





Delta

Recess Spot Light



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Delta

RECESS COB SPOT LIGHT - FIXED

The deep-recess COB downlighter is easy to install and delivers low-glare, uniform illumination that renders the true colors of objects. With a long, maintenance-free lifespan, Stefano Tunable is ideal for accent, general, and ambient lighting applications. Its compact design makes it perfect for shallow ceiling cavities and low- to medium-height spaces.

Luminaire Details


Product Name	: Delta
Product Type	: COB Spot Light
LED Type	: COB
Fixture Type	: Recess Mount
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Reflector	: Yes
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

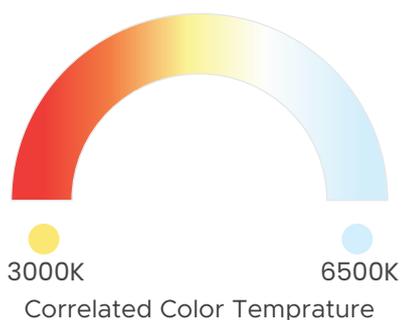

Ingress Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	7W	12W	18W	20W
Product Code	DLT-RSP-07	DLT-RSP-12	DLT-RSP-18	DLT-RSP-20
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	700*	1200*	1800*	2000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	24°/36°/48°	24°/36°/48°	24°/36°/48°	24°/36°/48°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)(ø)	51	59	66	66
Dimensions(mm)(Ø)	74x58	83x67	94x80	94x80
Shape	Round	Round	Round	Round

Wattage	24W	30W
Product Code	DLT-RSP-24	DLT-RSP-30
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2400*	3000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20
Beam Angle	24°/36°/48°	24°/36°/48°
Mounting	Recess	Recess
Fixture Color	White	White
Cutout(mm)(ø)	66	66
Dimensions(mm)(Ø)	94x80	94x80
Shape	Round	Round

Line Diagram

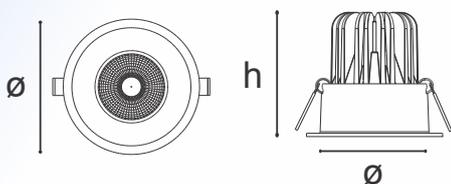

Photometric Details