



Clipsal

Industrial Batten



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Clipsal

LED IP65 LINEAR WEATHERPROOF LIGHT

Clipsal is a weatherproof Linear light made of engineered polycarbonate one piece housing. There are very less losses in this housing. It is suitable for areas where normal IP20 lights doesn't work due to the high moisture and dust particles. It's suitable for cold storage areas as well. Its elegant and premium design

Luminaire Details


Product Name	: Clipsal
Product Type	: Linear Weatherproof Light
LED Type	: SMD
Fixture Type	: Surface / Suspended
Dimmable	: Non Dimmable

Luminaire Source Details

Light Emission	: Area
Source Brand	: Bridgelux / Seoul
CRI	: >80
McAdam Binning	: Step 5

Luminaire Housing

Body	: PC
Reflector Type	: Polycarbonate
Operating Temperature	: -10° to 45° C
Humidity	: RH 10-90 %
IP Rating	: IP65
Emergency Compatibility	: Not Compatible

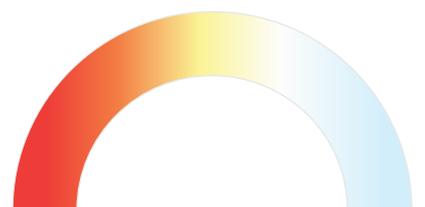

3000K 6500K

Correlated Color Temperature

Ingress Protection
IP65

LM
79

LM
80



TM
21

Technical Specifications

Wattage	20W	30W	20W	40W
Product Code	CLIP-TL-20-2FT	CLIP-TL-30-2FT	CLIP-TL-20-4FT	CLIP-TL-40-4FT
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2200*	3300*	2200*	4400*
Color Temperature	6500K/ 3000K	6500K/ 3000K	6500K/ 3000K	6500K/ 3000K
CRI	>80	>80	>80	>80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	3KV	3KV	3KV	4KV
IP Rating	IP65	IP65	IP65	IP65
Beam Angle	120°	120°	120°	120°
Mounting	Surface	Surface	Surface	Surface
Fixture Color	White	White	White	White
Dimensions(mm)(LXWXH)	510X62X70	510X62X70	1010X62X70	1010X62X70

Wattage	50W	60W
Product Code	CLIP-TL-50-4FT	CLIP-TL-60-4FT
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	5500*	6600*
Color Temperature	6500K/ 3000K	6500K/ 3000K
CRI	>80	>80
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	4KV	4KV
IP Rating	IP65	IP65
Beam Angle	120°	120°
Mounting	Surface	Surface
Fixture Color	White	White
Dimensions(mm)(LXWXH)	1010X62X70	1200X62X70

Line Diagram

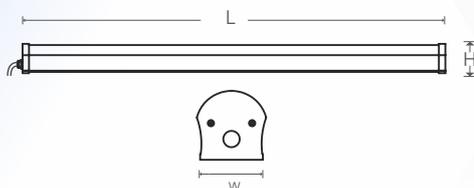

Photometric Details