



# *Dior*

## *WELL GLASS*



### Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL  
INSTITUTE



COMMON  
AREA



# Dior

## LED IP65 WEATHERPROOF WELL GLASS LIGHT

Dior Well Glass product is a weatherproof Well glass suitable for the hanging arrangements for low height areas as compared to Highbay application. Powder coated Pressure die cast Aluminium housing with transparent & milky cover makes it suitable for all type of customers. It's an Industrial product made for Industrial applications to deliver uniform & high light output.

### Luminaire Details


Product Name	: Dior
Product Type	: Weatherproof Well Glass
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: Non Dimmable

### Luminaire Source Details

Light Emission	: Indoor/Semi-Outdoor Area Lighting
Source Brand	: Bridgelux / Seoul
CRI	: >80
McAdam Binning	: Step 5

### Luminaire Housing

Body	: Die-Cast Aluminium
Reflector Type	: Polycarbonate (Clear/ Milky)
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: Ip65
Emergency Compatibility	: Not Compatible

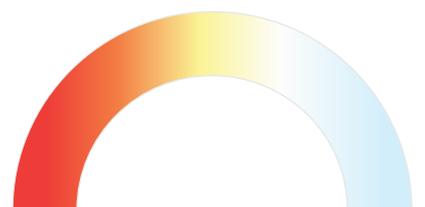

3000K 6500K

Correlated Color Temperature

Ingress Protection  
**IP65**

**LM**  
**79**

**LM**  
**80**



**IK**  
**07**

**TM**  
**21**

# Technical Specifications

Wattage	40W	50W	60W	80W
Product Code	DIOR-WG-40	DIOR-WG-50	DIOR-WG-60	DIOR-WG-80
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2200*	2200*	4400*	5500*
Color Temperature	6500K/ 3000K	6500K/ 3000K	6500K/ 3000K	6500K/ 3000K
CRI	>80	>80	>80	>80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	3KV	3KV	4KV	4KV
IP Rating	IP65	IP65	IP65	IP65
Beam Angle	120°	90°	90°	120°
Mounting	Surface	Surface	Surface	Surface
Fixture Cover	Milky	Milky	Milky	Milky
Fixture Color	Grey	Grey	Grey	Grey
Dimensions(mm)(ØXH)	145x161	191x207	191x207	191x207

Line Diagram

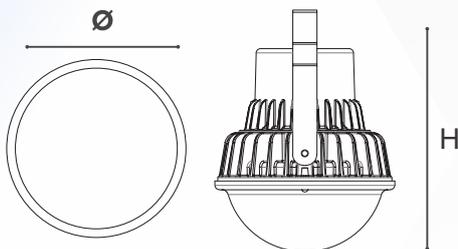

Photometric Details