


NORKA

Industrial Batten



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Norka

LED INDUSTRIAL ALUMINIUM BATTEN

Aluminium extruded LED batten light in square shape with high efficient polycarbonate diffuser for uniform lighting.

Luminaire Details


Product Name	: Norka
Product Type	: Industrial Aluminium Batten
LED Type	: SMD
Fixture Type	: Surface
Dimmable	: Non Dimmable

Luminaire Source Details

Light Emission	: Indoor Area Lighting
Source Brand	: Bridgelux / Seoul
CRI	: >80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector Type	: PC Diffuser
Operating Temperature	: -10° to 45° C
Humidity	: RH 10-90 %
IP Rating	: IP20
Emergency Compatibility	: Not Compatible

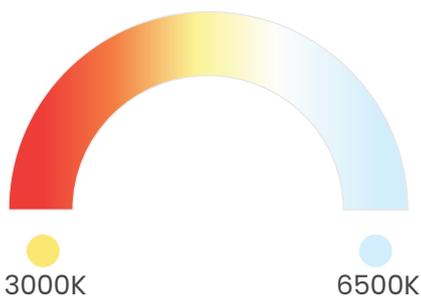

Correlated Color Temperature

Ingress Protection	LM	LM	TM
IP20	79	80	21

Technical Specifications

Wattage	20W	40W
Product Code	NOR-TL-20	NOR-TL-40
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2000*	4000*
Color Temperature	6500K/ 3000K	6500K/ 3000K
CRI	>80	>80
P.F.	>0.95	>0.95
THD	<20%	<20%
Surge Protection	4KV	4KV
IP Rating	IP20	IP20
Beam Angle	120°	120°
Secondary Optics (Lens)	No	No
Mounting	Surface	Surface
Fixture Color	NA	NA
Dimensions(mm)(LXWXH)	1130x22x36	1205x30x37

Line Diagram

