




Reliant Highbay



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Reliant Highbay

IP65 WEATHERPROOF LED HIGHBAY LIGHT

Crossbow round UFO Highbay light comes with spiral secondary optics & separate driver Box. It's a graceful design to replace all traditional type Highbays. It is powered by highly efficient LEDs to deliver very high light output to save the energy. Eye bolt is provided to suspend it and illuminate the areas.

Luminaire Details


Product Name	: Reliant Highbay
Product Type	: Weatherproof Highbay
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: Non Dimmable

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Reflector Type	: Polycarbonate Lens
Operating Temperature	: -10 to 50 C
Humidity	: RH 10-90 %
IP Rating	: IP65
Emergency Compatibility	: Not Compatible

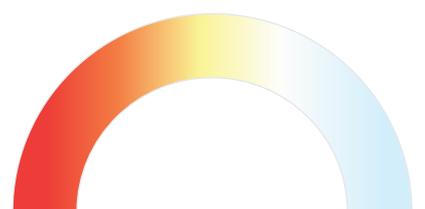

3000K 6500K

Correlated Color Temperature

Ingress Protection
IP65

LM
79

LM
80



IK
07

TM
21

Technical Specifications

Wattage	100W	120W	150W	200W
Product Code	REL-HBL-UFO-100	REL-HBL-UFO-120	REL-HBL-UFO-150	REL-HBL-UFO-200
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	13000*	15600*	19500*	26000
Color Temperature	6500K/ 3000K	6500K/ 3000K	6500K/ 3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	4KV	4KV	4KV+10KV (SPD)	4KV+10KV (SPD)
IP Rating	IP65	IP65	IP65	IP65
Beam Angle	90°	90°	90°	90°
Secondary Optics (Lens)	Yes	Yes	Yes	Yes
Mounting	Surface/Suspended	Surface/Suspended	Surface/Suspended	Suspended
Fixture Color	Black	Black	Black	Black
Dimensions(mm)(ØXH)	290x155	290x155	310x175	360x185

Line Diagram

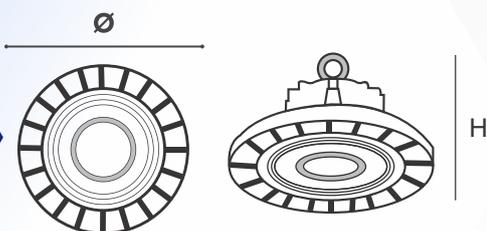

Photometric Details