



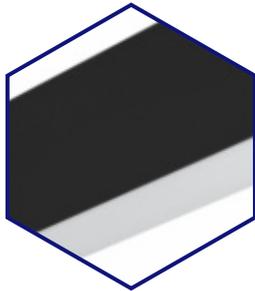

Elvion

RECESSED
LINEAR LIGHT

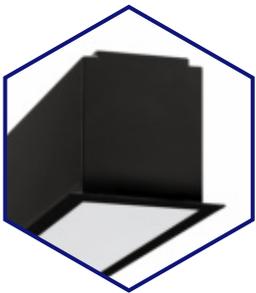

Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA

Elvion

Recessed Linear Light

The Cameo Recessed Linear Light features a powder-coated extruded aluminium profile with trim for seamless recess mounting. An opal diffuser ensures uniform illumination, while joineries allow smooth connection between profiles to achieve custom lighting designs. Ideal for offices, institutes, and design-focused spaces with false ceilings.

Luminaire Details


Product Name	: Elvion
Product Type	: SMD Linear Light
LED Type	: SMD
Fixture Type	: Recessed
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

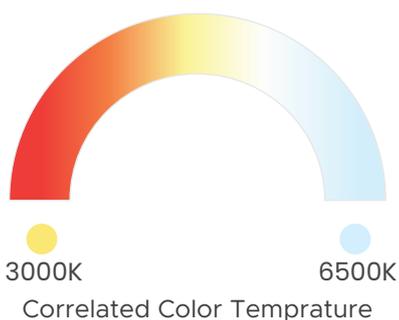

Ingress Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	20W	40W	50W	60W
Product Code	ELV-RLL-20	ELV-RLL-40	ELV-RLL-50	ELV-RLL-60
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1800*	3600*	4500*	5400*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.955	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Recessed	Recessed	Recessed	Recessed
Fixture Color	White/Black	White/Black	White/Black	White/Black
Dimensions(mm)(LxBxH)	600x50x35	1200x50x35	1500x50x35	1800x50x35
Shape	Linear	Linear	Linear	Linear

Wattage	80W
Product Code	ELV-RLL-80
Nominal Input Voltage	240V AC, 50Hz
Luminous Flux	1800*
Color Temperature	6500K/4000K/3000K
CRI	≥80
P.F.	>0.95
THD	<10%
Surge Protection	Up to 4KV
IP Rating	IP20
Beam Angle	120°
Mounting	Recessed
Fixture Color	White/Black
Dimensions(mm)(Ø)	2400x50x35
Shape	Linear

Line Diagram

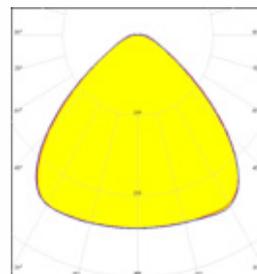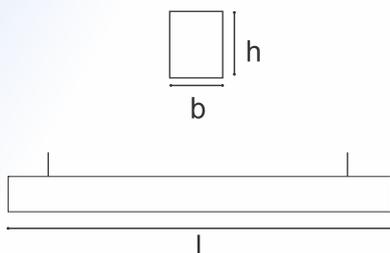

Photometric Details