

COMMERCIAL CATALOG



About Us

In 2021, Beldon Lighting India Pvt Ltd was born from a vision to create something exceptional, a family-owned business a group company which is involved in Real Estate, construction, land development , hotel segment. From the very beginning, the foundation of our success has been rooted in listening closely to our customers. By understanding their needs and aspirations, we have engineered products that are as innovative as they are practical, designed to illuminate any space with purpose and style.

Beldon lighting , forward-thinking is in our DNA. We thrive on collaboration, whether it's among our passionate team members or in partnership with our customers. This synergy fuels our creativity, inspiring us to develop a diverse range of lighting.

“

Every product we craft is a testament to our commitment to solving challenges with ingenuity and pushing the boundaries of design to meet the highest standards.

”

Seamlessly blending form and function, our products integrate effortlessly into spaces, enhancing the beauty of their surroundings while delivering unparalleled performance.



Our Philosophy

Vision

- ✦ To find fulfillment through continual improvement of life quality.
- ✦ To empower people and businesses to reach their full potential.
- ✦ To uphold integrity, fairness, and performance in all we do.



Mission

- ✦ To create quality lighting for global markets.
To ensure timely product delivery.
- ✦ To enhance technical manufacturing excellence.
To invest continuously in our people.
To implement TQM and HSE for better performance.
- ✦ To offer top service with complete transparency.




Values

- ✦ **Integrity Always:** Honesty, fairness, and transparency in every action.
- ✦ **Quality First:** Excellence through precision and improvement.
- ✦ **Customer Focus:** Building trust and lasting value.
- ✦ **Responsible Innovation:** Driving progress with sustainability and safety.



Ageing & Testing

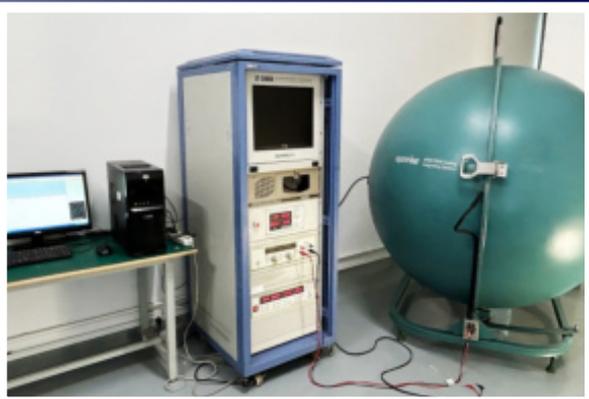

Warehouse & Delivery



Manufacturing Setup



INDEX



Pg. no. 7-9



Pg. no. 10-12



Pg. no. 13-15



Pg. no. 16-18



Pg. no. 19-22



Pg. no. 23-27




Pg. no. 28-30



Pg. no. 31-33



Pg. no. 34-36

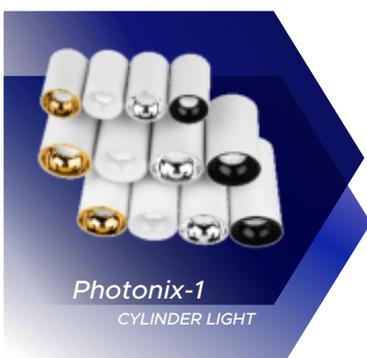

Pg. no. 37-40



Pg. no. 41-44



Pg. no. 45-47

INDEX



Pg. no. 48-50



Pg. no. 51-53



Pg. no. 54-55



Pg. no. 56-58




Pg. no. 59-61



Pg. no. 62-65



Pg. no. 66-68

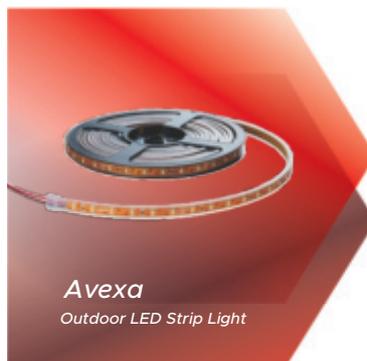

Pg. no. 69-71



Pg. no. 72-73



Pg. no. 74-75

INDEX



Pg. no. 76-78



Pg. no. 79-81




Pg. no. 82-84



Pg. no. 85-87



Pg. no. 88-90

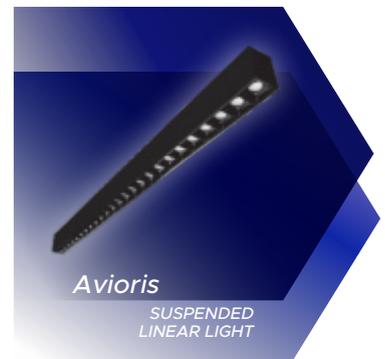

Pg. no. 91-93



Pg. no. 94-96



Pg. no. 97-99



Pg. no. 100-102



Pg. no. 103-105



Pg. no. 106-108



Pg. no. 109-111



Lumera

Deep Recess Downlight



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Lumera

DEEP RECESS SMD DOWNLIGHT

A round/square backlit LED downlight crafted with a durable die-cast aluminium housing, engineered with a reflector design for superior lumen efficacy. The opal diffuser is seamlessly integrated into the inner periphery of the deep-recessed trim to minimize glare and deliver smooth, uniform illumination.

Luminaire Details


Product Name	: Lumera
Product Type	: SMD Downlight
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20
Emergency Compatibility	: No

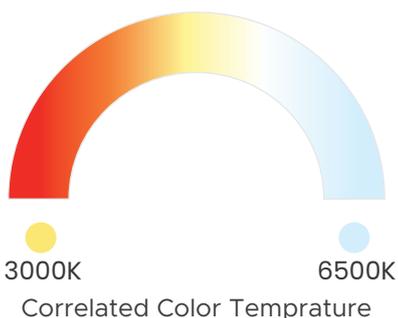

Ingress
Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	7W	12W	18W	24W
Product Code	LUM-DRR-07	LUM-DRR-12	LUM-DRR-18	LUM-DRR-24
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	840*	1440*	2160*	2880*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	4KV+10KV	4KV+10KV	4KV+10KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)(ø)	110	110	145	165
Dimensions(mm)(Ø)	120(Ø)x50	120(Ø)x50	155(Ø)x55	175(Ø)x55
Shape	Round	Round	Round	Round

Wattage	7W	12W	18W	24W
Product Code	LUM-DRS-07	LUM-DRS-12	LUM-DRS-18	LUM-DRS-24
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	840*	1440*	2160*	2880*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	4KV+10KV	4KV+10KV	4KV+10KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)(ø)	110	110	145	165
Dimensions(mm)(LxBxH)	100x100x50	100x100x50	145x145x55	168x168x55
Shape	Square	Square	Square	Square

Line Diagram

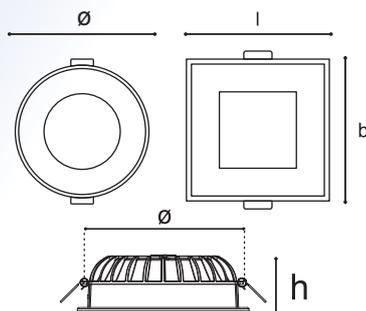

Photometric Details



Nebula

Backlit Downlight



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Nebula

RECESS SMD BACKLIT DOWNLIGHT

A sleek round backlit LED downlight built with an aluminium housing, designed for enhanced aesthetics and superior performance. High-efficacy LEDs paired with a precision diffuser ensure a glare-free, uniform light output.

Luminaire Details


Product Name	: Nebula
Product Type	: SMD Downlight
LED Type	: SMD
Fixture Type	: Recess Mount
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20
Emergency Compatibility	: Not Compatible

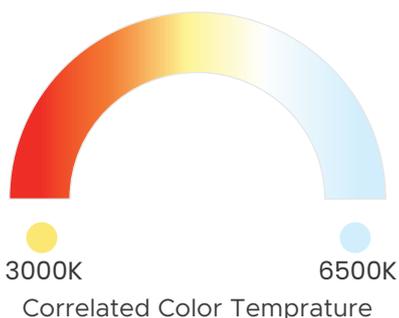

Ingress Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	3W	6W	8W	10W
Product Code	NEB-RBD-03	NEB-RBD-06	NEB-RBD-08	NEB-RBD-10
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	300*	600*	800*	1000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)(ø)	110	110	145	165
Dimensions(mm)(Ø)	120(Ø)x50	120(Ø)x50	155(Ø)x55	175(Ø)x55
Shape	Round	Round	Round	Round

Wattage	12W	15W	18W	24W
Product Code	NEB-RBD-12	NEB-RBD-15	NEB-RBD-18	NEB-RBD-24
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1200*	1500*	1800*	2400*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)(ø)	110	110	145	165
Dimensions(mm)(LxBxH)	100x100x50	100x100x50	145x145x55	168x168x55
Shape	Square	Square	Square	Square

Line Diagram


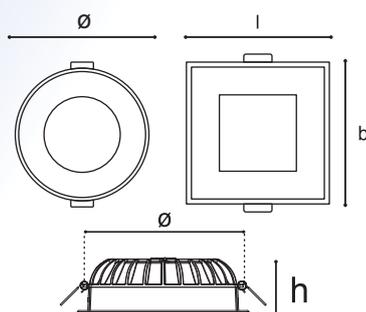


Photometric Details



Elvon

Deep Recess Spot Light



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Elvon

DEEP RECESS COB SPOT LIGHT - FIXED

A round/square backlit LED downlight crafted with a durable die-cast aluminium housing, engineered with a reflector design for superior lumen efficacy. The opal diffuser is seamlessly integrated into the inner periphery of the deep-recessed trim to minimize glare and deliver smooth, uniform illumination.

Luminaire Details


Product Name	: Elvon
Product Type	: COB Spot Light
LED Type	: COB
Fixture Type	: Recess Mount
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Reflector	: Yes
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

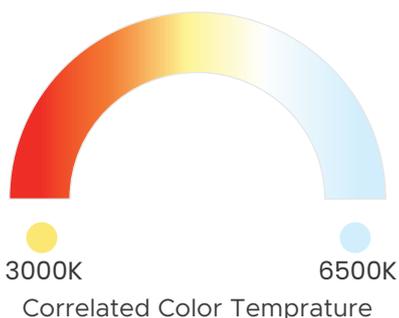

Ingress Protection
IP20

LM

79

LM

80

TM



21

Technical Specifications

Wattage	7W	12W	18W	24W
Product Code	ELV-DRCR-07	ELV-DRCR-12	ELV-DRCR-18	ELV-DRCR-24
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	700*	1200*	1800*	2400*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White/Black	White/Black	White/Black	White/Black
Cutout(mm)(Ø)	53	74	82	105
Dimensions(mm)(Ø)	68x65	84x77	94x94	105x115
Shape	Round	Round	Round	Round

Wattage	30W	7W	12W	18W
Product Code	ELV-DRCR-30	ELV-DRCRS-07	ELV-DRCRS-12	ELV-DRCRS-18
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	3000*	700*	1200*	1800*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White/Black	White/Black	White/Black	White/Black
Cutout(mm){Ø/(LxB)}	105	61x61	76x76	86x86
Dimensions(mm)(Ø/L X B)	105x115	70x70x65	84x84x84	95x95x95
Shape	Round	Square	Square	Square

Line Diagram


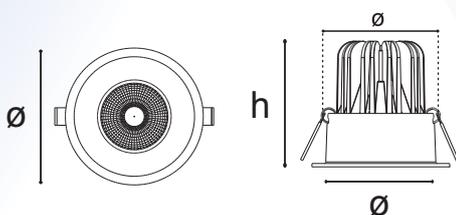


Photometric Details



Delta

Recess Spot Light



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Delta

RECESS COB SPOT LIGHT - FIXED

The deep-recess COB downlighter is easy to install and delivers low-glare, uniform illumination that renders the true colors of objects. With a long, maintenance-free lifespan, Stefano Tunable is ideal for accent, general, and ambient lighting applications. Its compact design makes it perfect for shallow ceiling cavities and low- to medium-height spaces.

Luminaire Details


Product Name	: Delta
Product Type	: COB Spot Light
LED Type	: COB
Fixture Type	: Recess Mount
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Reflector	: Yes
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

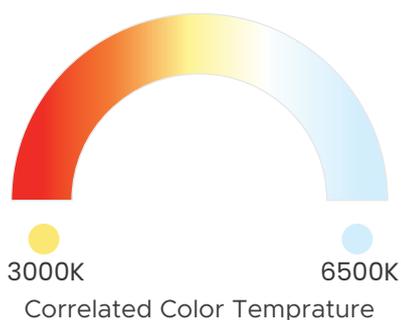

Ingress Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	7W	12W	18W	20W
Product Code	DLT-RSP-07	DLT-RSP-12	DLT-RSP-18	DLT-RSP-20
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	700*	1200*	1800*	2000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	24°/36°/48°	24°/36°/48°	24°/36°/48°	24°/36°/48°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)(ø)	51	59	66	66
Dimensions(mm)(Ø)	74x58	83x67	94x80	94x80
Shape	Round	Round	Round	Round

Wattage	24W	30W
Product Code	DLT-RSP-24	DLT-RSP-30
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2400*	3000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20
Beam Angle	24°/36°/48°	24°/36°/48°
Mounting	Recess	Recess
Fixture Color	White	White
Cutout(mm)(ø)	66	66
Dimensions(mm)(Ø)	94x80	94x80
Shape	Round	Round

Line Diagram

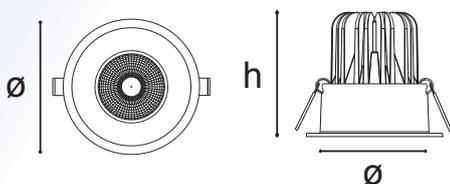


Photometric Details



Spectre

Recess Spot Light-Movable



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Spectre

RECESS COB SPOT LIGHT - MOVABLE

A recessed adjustable COB downlight crafted with a die-cast aluminium housing and a robust heat sink for exceptional thermal management. It features a high-efficiency reflector designed to deliver superior light output with precision and clarity.

Luminaire Details


Product Name	: Spectre
Product Type	: COB Spot Light
LED Type	: COB
Fixture Type	: Recess Mount
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Reflector	: Yes
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

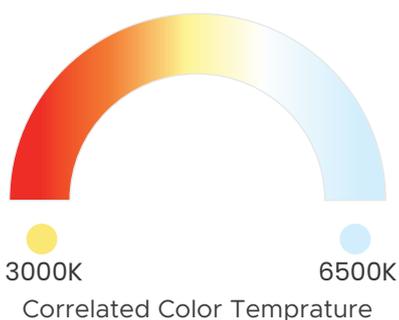

Ingress Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	7W	12W	18W	24W
Product Code	SPR-RSM-07	SPR-RSM-12	SPR-RSM-18	SPR-RSM-24
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	700*	1200*	1800*	2400*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)(ø)	74	83	105	125
Dimensions(mm)(Øxh)	89x49	105x65	123x76	151x88
Shape	Round	Round	Round	Round

Wattage	30W
Product Code	SPR-RSM-30
Nominal Input Voltage	240V AC, 50Hz
Luminous Flux	3000*
Color Temperature	6500K/4000K/3000K
CRI	≥80
P.F.	>0.95
THD	<10%
Surge Protection	Up to 4KV
IP Rating	IP20
Beam Angle	15°/24°/36°
Mounting	Recess
Fixture Color	White
Cutout(mm){Ø/(LxB)}	125
Dimensions(mm)(Ø/L X B)	151x88
Shape	Round

Line Diagram


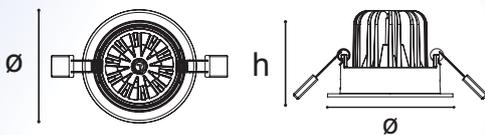


Photometric Details



Marvo

Recess Zoom Light-Movable



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Marvo

RECESS ZOOM LIGHT - MOVABLE

The design features a fully enclosed, precision die-cast aluminium construction with smooth pan and tilt adjustment for flexible aiming. This adjustable recessed single-chip COB downlight is equipped with a high-quality aluminium reflector to ensure efficient, consistent illumination.

Luminaire Details


Product Name	: Marvo
Product Type	: COB Zoom Light
LED Type	: COB
Fixture Type	: Recess Mount
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Reflector	: Yes
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

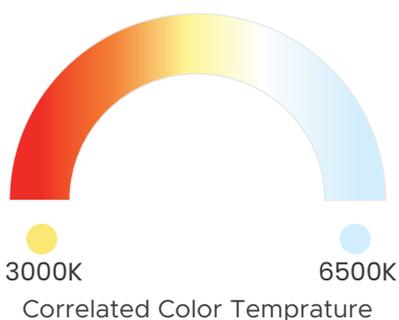

Ingress Protection
IP20

LM
79

LM
80


TM
21

Technical Specifications

Wattage	12W	20W	30W	40W
Product Code	MRV-RZL-12	MRV-RZL-20	MRV-RZL-30	MRV-RZL-40
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1200*	2000*	3000*	4000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	24°/36°/60°	24°/36°/60°	24°/36°/60°	24°/36°/60°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)(∅)	74	83	105	125
Dimensions(mm)(∅xh)	89x49	105x65	123x76	151x88
Shape	Round	Round	Round	Round
Tiltable	Yes	Yes	Yes	Yes

Wattage	50W
Product Code	MRV-RZL-50
Nominal Input Voltage	240V AC, 50Hz
Luminous Flux	5000*
Color Temperature	6500K/4000K/3000K
CRI	≥80
P.F.	>0.95
THD	<10%
Surge Protection	Up to 4KV
IP Rating	IP20
Beam Angle	24°/36°/60°
Mounting	Recess
Fixture Color	White
Cutout(mm)(∅)	125
Dimensions(mm)(∅xh)	151x88
Shape	Round
Tiltable	Yes

Line Diagram

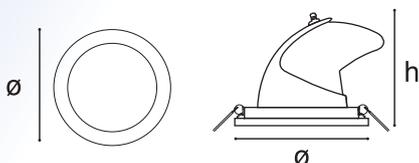



Iris

RECESS COB DOWN LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Iris

Recess COB Down Light - Fixed

A recessed round COB downlight crafted from die-cast aluminium with a premium powder-coated finish. It offers excellent heat-sink performance to minimize luminous degradation and ensure long-lasting, reliable illumination.

Luminaire Details


Product Name	: Iris
Product Type	: COB Spot Light
LED Type	: COB
Fixture Type	: Recess Mount
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Reflector	: Yes
Diffuser Type	: Lens
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP65

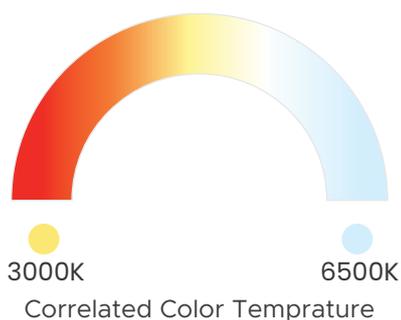

Ingress Protection
IP65

LM
79

LM
80



TM
21

Technical Specifications

Wattage	7W	12W	15W	18W
Product Code	IRS-RCF-03	IRS-RCF-12	IRS-RCF-15	IRS-RCF-18
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	700*	1200*	1500*	1800*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP65	IP65	IP65	IP65
Beam Angle	24°/36°/48°/60°	24°/36°/48°/60°	24°/36°/48°/60°	24°/36°/48°/60°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)(ø)	71	71	71	93
Dimensions(mm)(Øxh)	85x68	85x68	85x68	111x76
Shape	Round	Round	Round	Round

Wattage	20W	24W	30W	36W
Product Code	IRS-RCF-20	IRS-RCF-24	IRS-RCF-30	IRS-RCF-36
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2000*	2400*	3000*	3600*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP65	IP65	IP65	IP65
Beam Angle	24°/36°/48°/60°	24°/36°/48°/60°	24°/36°/48°/60°	24°/36°/48°/60°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)(ø)	93	93	118	118
Dimensions(mm)(Øxh)	111x76	111x76	135x91	135x91
Shape	Round	Round	Round	Round

Line Diagram


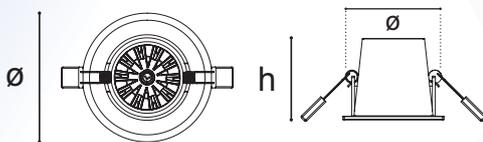


Photometric Details

Technical Specifications

Wattage	40W	45W
Product Code	IRS-RCF-40	IRS-RCF-45
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	4000*	4500*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP65	IP65
Beam Angle	24°/36°/48°/60°	24°/36°/48°/60°
Mounting	Recess	Recess
Fixture Color	White	White
Cutout(mm)(∅)	152	152
Dimensions(mm)(∅xh)	181x108	181x108
Shape	Round	Round

Line Diagram

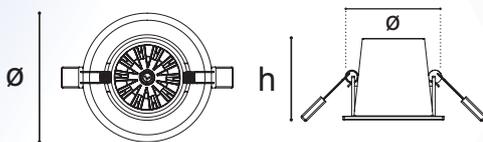


Photometric Details



Kronos

RECESS COB SPOT LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Kronos

Recess Fixed Cob Spot Light With Colorful Rings

The COB spotlight comes with multiple reflector finishes like chrome, rose gold, gold, and shining black. Its die-cast aluminium heatsink ensures long life and consistent brightness, while the efficient COB and reflector deliver vibrant light—ideal for homes, offices, retail, and hotels.

Luminaire Details


Product Name	: Kronos
Product Type	: COB Spot Light
LED Type	: COB
Fixture Type	: Recess Mount
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Reflector	: Yes
Diffuser Type	: Lens
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

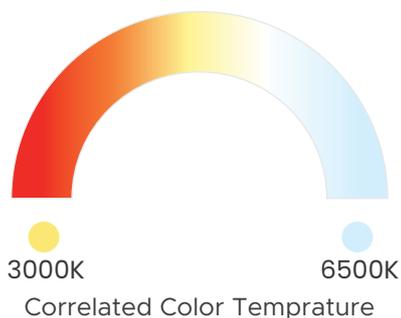

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	7W	12W	18W
Product Code	KRS-RCS-07	KRS-RCS-12	KRS-RCS-18
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	700*	1200*	1800*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20
Beam Angle	40°	40°	40°
Mounting	Recess	Recess	Recess
Fixture Color	Black/ White	Black/ White	Black/ White
Cutout(mm)(\emptyset)	55	75	95
Dimensions(mm)(\emptyset xh)	80x77	85x77	110x103
Shape	Round	Round	Round
Ring Color	White/Black/Chrome/ Rose Gold/ Gold/ Shining Black	White/Black/Chrome/ Rose Gold/ Gold/ Shining Black	White/Black/Chrome/ Rose Gold/ Gold/ Shining Black

Line Diagram

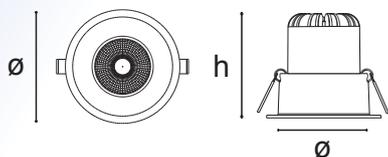


Photometric Details



Duospark

GIMBAL DOWNLIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Duospark

GIMBAL Downlight

A compact decorative adjustable COB gimbal light featuring clean fascias, a precision die-cast adjustable lamp housing, and a durable polycarbonate reflector, engineered to deliver efficient, high-performance illumination with refined aesthetics.

Luminaire Details


Product Name	: Duospark
Product Type	: Focus Light
LED Type	: COB
Fixture Type	: Recess Mount

Luminaire Source Details

Light Emission	: Indoor Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: Yes
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

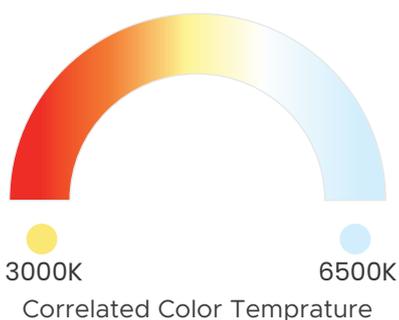

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	12W	2X12W	20W	2X20W
Product Code	DSK-GL-12	DSK-GL-24	DSK-GL-20	DSK-GL-40
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1200*	2400*	2000*	4000*
Color Temperature	5700K/4000K/3000K	5700K/4000K/3000K	5700K/4000K/3000K	5700K/4000K/3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	40°	40°	40°	40°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	Black/ White	Black/ White	Black/ White	Black/ White
Dimensions(mm)(LxBxH)	146x146x140	275x146x14	146x146x140	275x146x14
Shape	Square	Rectangle	Square	Rectangle
No. of Modules	1	2	1	2

Line Diagram

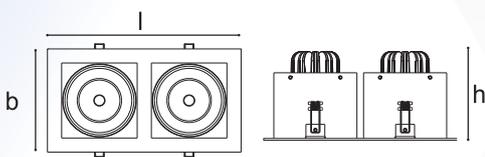

Photometric Details



Photonix-1

CYLINDER LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Photonix-1

Cylinder Light

Crafted with precision, this aluminium cylindrical fixture blends seamlessly into modern offices, retail spaces, and premium restaurants. It offers customizable ring colors to match any theme and supports both surface-mounted and suspended installations. The shining ring adds an elegant, eye-catching appeal.

Luminaire Details


Product Name	: Photonix-1
Product Type	: COB Spot Light
LED Type	: COB
Fixture Type	: Surface Mount/ Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: Yes
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

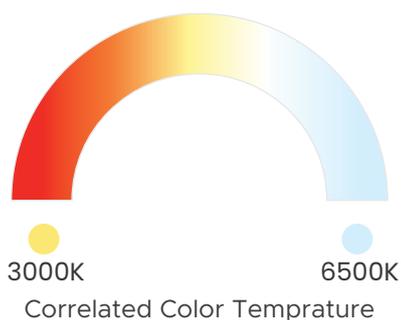

Ingress Protection
IP20

LM
79

LM
80


TM
21

Technical Specifications

Wattage	7W	7W	12W	15W
Product Code	PX1-CL1-07	PX1-CL2-07	PX1-CL3-12	PX1-CL4-15
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	700*	700*	1200*	1200*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	45°	45°	45°	45°
Mounting	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended
Fixture Color	Black/ White	Black/ White	Black/ White	Black/ White
Reflector Color	Shining Black/ Chrome/ White/ Rose Gold			
Dimensions(mm)(Øxh)	50x80	50x105	70x110	70x150
Shape	Cylindrical	Cylindrical	Cylindrical	Cylindrical
Suspending Wire Length	1.5M	1.5M	1.5M	1.5M

Wattage	24W	24W	30W	40W
Product Code	PX1-CL5-24	PX1-CL6-24	PX1-CL7-30	PX1-CL8-40
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2400*	2400*	3000*	4000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	45°	45°	45°	45°
Mounting	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended
Fixture Color	Black/ White	Black/ White	Black/ White	Black/ White
Reflector Color	Shining Black/ Chrome/ White/ Rose Gold			
Dimensions(mm)(Øxh)	70x150	93x150	93x180	93x180
Shape	Cylindrical	Cylindrical	Cylindrical	Cylindrical
Suspending Wire Length	1.5M	1.5M	1.5M	1.5M


Line
Diagram



Technical Specifications

Wattage	25W	30W	40W	50W
Product Code	PX1-CL9-25	PX1-CL10-30	PX1-CL11-40	PX1-CL12-50
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2500*	3000*	4000*	5000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	45°	45°	45°	45°
Mounting	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended
Fixture Color	Black/ White	Black/ White	Black/ White	Black/ White
Reflector Color	Shining Black/ Chrome/ White/ Rose Gold			
Dimensions(mm)(Øxh)	115x150	115x150	115x180	115x200
Shape	Cylindrical	Cylindrical	Cylindrical	Cylindrical
Suspending Wire Length	1.5M	1.5M	1.5M	1.5M


Line Diagram





Photonix-2

CYLINDER LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Photonix-2

Cylinder Light

A round aluminium cylindrical ceiling light available in white or black finish, built with high-quality LEDs and driver. Offered in multiple wattages for powerful performance and a sleek look. Ideal for indoor areas such as porches, entrances, patios, verandahs, balconies, and staircases.

Luminaire Details


Product Name	: Photonix-2
Product Type	: COB Spot Light
LED Type	: COB
Fixture Type	: Surface Mount/ Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: Yes
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

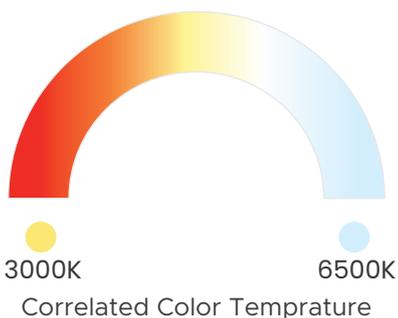

Ingress Protection
IP20

LM
79

LM
80


TM
21

Technical Specifications

Wattage	3W	7W	10W	12W
Product Code	PX2-CL1-03	PX2-CL2-07	PX2-CL3-10	PX2-CL4-12
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	300*	700*	1000*	1200*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	24°/40°/60°	24°/40°/60°	24°/40°/60°	24°/40°/60°
Mounting	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended
Fixture Color	Black/ White	Black/ White	Black/ White	Black/ White
Reflector	Yes	Yes	Yes	Yes
Ring Color(Aluminium Metal)	White/ Black	White/ Black	White/ Black	White/ Black
Dimensions(mm)(Øxh)	50x105	50x105	50x135	60x150
Shape	Cylindrical	Cylindrical	Cylindrical	Cylindrical
Suspending Wire Length	1.5M	1.5M	1.5M	1.5M

Wattage	18W	20W	24W	30W
Product Code	PX2-CL5-18	PX2-CL6-20	PX2-CL7-24	PX2-CL8-30
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1800*	2000*	2400*	3000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	24°/40°/60°	24°/40°/60°	24°/40°/60°	24°/40°/60°
Mounting	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended
Fixture Color	Black/ White	Black/ White	Black/ White	Black/ White
Reflector	Yes	Yes	Yes	Yes
Ring Color(Aluminium Metal)	White/ Black	White/ Black	White/ Black	White/ Black
Dimensions(mm)(Øxh)	60x150	80x150	80x150	80x180
Shape	Cylindrical	Cylindrical	Cylindrical	Cylindrical
Suspending Wire Length	1.5M	1.5M	1.5M	1.5M


Line Diagram




Technical Specifications

Wattage	40W
Product Code	PX2-CL9-40
Nominal Input Voltage	240V AC, 50Hz
Luminous Flux	4000*
Color Temperature	6500K/4000K/3000K
CRI	≥80
P.F.	>0.95
THD	<10%
Surge Protection	Up to 4KV
IP Rating	IP20
Beam Angle	24°/40°/60°
Mounting	Surface/ Suspended
Fixture Color	Black/ White
Reflector	Yes
Ring Color(Aluminium Metal)	White/ Black
Dimensions(mm)(Øxh)	80x195
Shape	Cylindrical
Suspending Wire Length	1.5M


Line Diagram



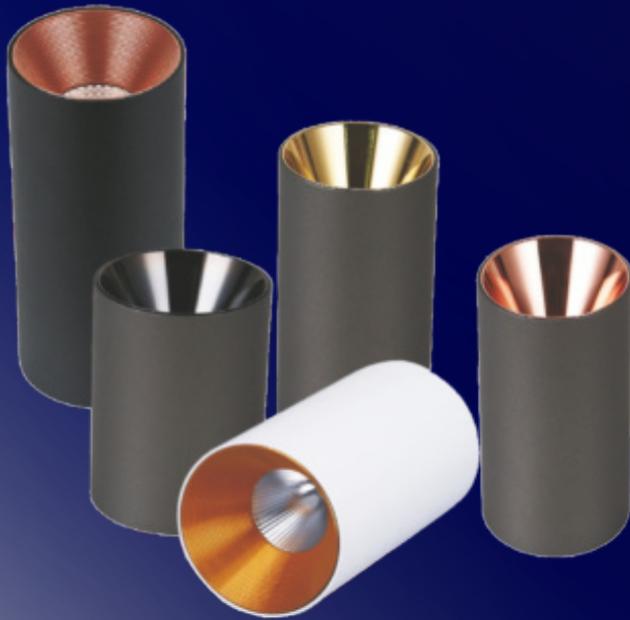

Photonix-3

CYLINDER LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Photonix-3

Cylinder Light

The cylinder light features an aluminium housing with a matching powder-coated aluminium front ring and reflector. Available in both surface and suspended mounting options, it offers three beam angles, making it suitable for a wide range of applications.

Luminaire Details


Product Name	: Photonix-3
Product Type	: COB Spot Light
LED Type	: COB
Fixture Type	: Surface Mount/ Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: Yes
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

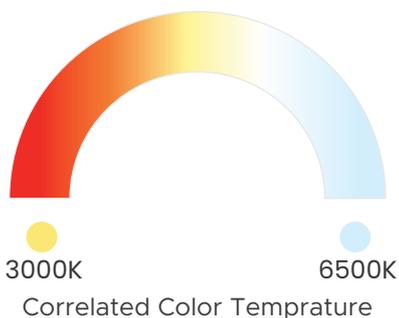

Ingress Protection
IP20

LM
79

LM
80


TM
21

Technical Specifications

Wattage	7W	10W	12W	15W
Product Code	PX3-CL1-07	PX3-CL2-10	PX3-CL3-12	PX3-CL4-15
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	700*	1000*	1200*	1500*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	40°	40°	40°	40°
Mounting	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended	Surface/ Suspended
Fixture Color	Black/ White	Black/ White	Black/ White	Black/ White
Reflector Color	White/ Black/ Rose Gold/ Gold/ Chrome			
Dimensions(mm)(Øxh)	80x110	80x150	80x150	80x180
Shape	Cylindrical	Cylindrical	Cylindrical	Cylindrical
Suspending Wire Length	1.5M	1.5M	1.5M	1.5M

Wattage	18W
Product Code	PX3-CL5-18
Nominal Input Voltage	240V AC, 50Hz
Luminous Flux	1800*
Color Temperature	6500K/4000K/3000K
CRI	≥80
P.F.	>0.95
THD	<10%
Surge Protection	Up to 4KV
IP Rating	IP20
Beam Angle	40°
Mounting	Surface/ Suspended
Fixture Color	Black/ White
Reflector Color	White/ Black/ Rose Gold/ Gold/ Chrome
Dimensions(mm)(Øxh)	80x180
Shape	Cylindrical
Suspending Wire Length	1.5M

Line
Diagram





Clarion

RECESS BACKLIT PANELS



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Clarion

RECESS MOUNT BACKLIT PANELS

Our recessed-mount LED panel is a meticulously engineered backlit fixture designed for Armstrong/Grid ceilings. It delivers exceptional brightness, refined aesthetics, and a seamless integration into any interior environment

Luminaire Details


Product Name	: Clarion
Product Type	: SMD Backlit Light
LED Type	: SMD
Fixture Type	: Recess Mount
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

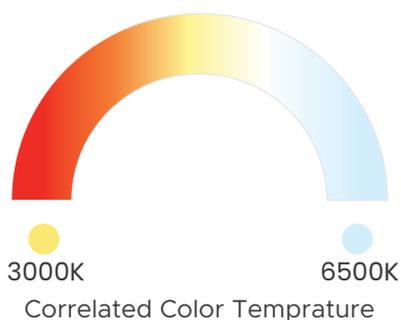

Ingress Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	24W	30W	30W	60W
Product Code	CRN-RBP1x1-24	CRN-RBP1x1-30	CRN-RBP1x2-30	CRN-RBP1x4-60
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2400*	3000*	3000*	6000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	4KV	4KV	4KV	4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Recess	Recess	Recess	Recess
Fixture Color	White	White	White	White
Cutout(mm)	NA	NA	NA	NA
Dimensions(mm)(LxB)	295x295	295x295	295x595	295x1195
Shape	1x1	1x1	1x2	1x4

Wattage	36W	96W
Product Code	CRN-RBP2x2-36	CRN-RBP2x4-96
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	3600*	9600*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	4KV	4KV
IP Rating	IP20	IP20
Beam Angle	120°	120°
Mounting	Recess	Recess
Fixture Color	White	White
Cutout(mm)	NA	NA
Dimensions(mm)(LxB)	595x595	595x1195
Shape	2x2	2x4

Line Diagram




Photometric Details



Ventaris

COB TRACK LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Vantaris

COB TRACK LIGHT

Organic design with aluminium housing & heat sink for efficient heat dissipation. Ideal for retail & hospitality. Optical lens for better light distribution. It provides best optical and thermal solution for high-performance.

Luminaire Details


Product Name	: Vantaris
Product Type	: COB Track Light
LED Type	: COB
Fixture Type	: Track Mount
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

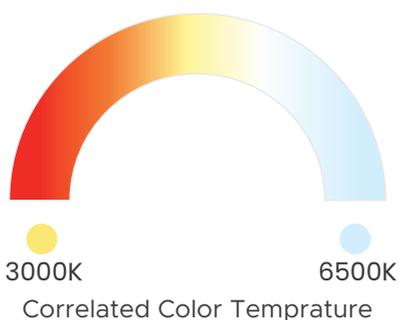

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	10W	20W	30W	40W
Product Code	VTS-CTL-10	VTS-CTL-20	VTS-CTL-30	VTS-CTL-40
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	900*	1800*	3000*	4000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	36°	36°	36°	36°
Mounting	Track Mounted	Track Mounted	Track Mounted	Track Mounted
Fixture Color	White/Black	White/Black	White/Black	White/Black
Dimensions(mm)(Ø)	50x129	60x143	80x170	80x195
Tiltable	Yes	Yes	Yes	Yes
Shape	Round	Round	Round	Round


Line Diagram



Photometric Details



Track



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE




COMMON
AREA



Technical Specifications

Wattage	1Meter	2Meter
Product Code	TRA-10	TRA-20
Mounting	Surface Mounted	Surface Mounted
Fixture Color	Black/ White	Black/ White
Dimensions(mm)(L)	1 Meter	2 Meter
Shape	Rectangular	Rectangular



Line Diagram





Venura

SURFACE MOUNT WALL LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Venura

Surface Mount Wall Light

A surface-mounted cylindrical COB adjustable light featuring an extruded aluminium housing and die-cast heat sink. Its high-efficiency COB paired with optimized optics delivers cheerful illumination with precise light distribution.

Luminaire Details


Product Name	: Venura
Product Type	: COB Wall Light
LED Type	: COB
Fixture Type	: Surface Mount
Dimmable	: No

Luminaire Source Details

Light Emission	: Indoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Optics	: Lens
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

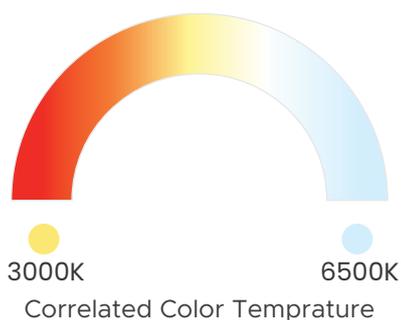

Ingress Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	10W	20W	30W	20W
Product Code	VNA-SMW1-10	VNA-SMW2-20	VNA-SMW3-30	VNA-SMW4-20
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	900*	1800*	2700*	1800*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.9	>0.9	>0.9	>0.9
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	40°/60°	40°/60°	40°/60°	40°/60°
Mounting	Surface	Surface	Surface	Surface
Fixture Color	White/Black	White/Black	White/Black	White/Black
Dimensions(mm)(Ø)	85x135	85x160	110x160	70x116
Shape	Round Cylindrical	Round Cylindrical	Round Cylindrical	Curve Rectangular

Wattage	30W	40W
Product Code	VNA-SMW5-30	VNA-SMW6-40
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2700*	3600*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
P.F.	>0.9	>0.9
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20
Beam Angle	40°/60°	40°/60°
Mounting	Surface	Surface
Fixture Color	White/Black	White/Black
Dimensions(mm)(Ø/L X B)	90x116	90x130
Shape	Curve Rectangular	Curve Rectangular


Line Diagram



Photometric Details

Novion

ALUMINIUM LED BATTEN



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA

Novion

Aluminium Led Batten

A sleek, seamless extruded aluminium LED batten designed for workspaces and retail environments. Its high-efficiency housing and 120° polycarbonate diffuser ensure optimum performance and uniform, glare-free illumination.

Luminaire Details


Product Name	: Novion
Product Type	: SMD Batten
LED Type	: SMD
Fixture Type	: Surface Mount
Dimmable	: No

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

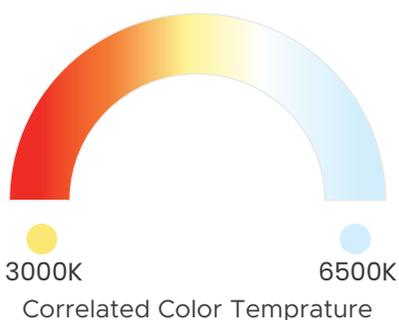

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	20W	22W	40W
Product Code	NVN-ALB-20	NVN-ALB-22	NVN-ALB-40
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2000*	2200*	4000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%
Surge Protection	4KV	4KV	4KV
IP Rating	IP20	IP20	IP20
Beam Angle	120°	120°	36°
Mounting	Surface	Surface	Surface
Fixture Color	Anodized	Anodized	Anodized
Dimensions(mm)(LxBxH)	1125x21x36	1175x21x36	1170 X 21 x 36

Line Diagram




Photometric Details



Magnetic Track Light



Magnetic Profile Light



Magnetic Linear Spot Light



Magnetic Linear Spot Light - Adjustable



Magnetic Hanging Spot Light



Magnetic Linear Light - L Type

Vexa

MAGNETIC LIGHTS

Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Vexa

Magnetic Lights

Magnetic track lights offer a modern blend of beauty and functionality. Their energized, magnetized tracks—available in recessed and suspended styles—allow lights to be easily attached, moved, or removed. The system is user-friendly, low-maintenance, and supports multiple light types on a single track, including spotlights, diffused linear profiles, and adjustable linear spots. Ideal for offices, museums, hotels, and premium residences.

Luminaire Details


Product Name	: Vexa
Product Type	: COB/ SMD Light
LED Type	: COB/ SMD
Fixture Type	: Track Mount
Dimmable	: No

Luminaire Source Details

Light Emission	: Indoor Focus/ Area Lighting
Source Brand	: Bridgelux / CITIZEN/ Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector/Lens	: Yes
Diffuser Type	: Clear / Diffused
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

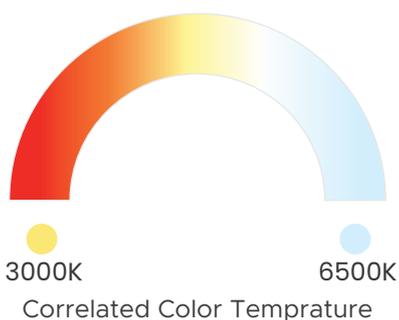

Ingress Protection
IP20

LM
79

LM
80

TM
21

Technical Specifications

Magnetic Track Light

Magnetic Profile Light



Wattage	Magnetic Track Light		Magnetic Profile Light	
	12W	24W	12W	24W
Product Code	VE-VE-MTL-12	VE-MTL-24	VE-MPL-12	VE-MPL-24
Nominal Input Voltage	48V DC	24V DC	24V DC	24V DC
Luminous Flux	1080*	1800*	3000*	4000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	24°	24°	120°	120°
Mounting	Track Mounted	Track Mounted	Track Mounted	Track Mounted
Fixture Color	Black	Black	Black	Black
Dimensions(mm)(Ø/LxBxH)	Ø50x180(H)	Ø60x200(H)	300x22x43	600x22x43
Tiltable	Yes	Yes	No	No
Shape	Cylindrical	Cylindrical	Rectangular	Rectangular

Magnetic Linear Spot Light

Wattage	Magnetic Linear Spot Light			
	6W	12W	18W	24W
Product Code	VE-MLSL-06	VE-MLSL-12	VE-MLSL-18	VE-MLSL-24
Nominal Input Voltage	48V DC	24V DC	24V DC	24V DC
Luminous Flux	1080*	1800*	3000*	4000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	24°	24°	24°	24°
Mounting	Track Mounted	Track Mounted	Track Mounted	Track Mounted
Fixture Color	Black	Black	Black	Black
Dimensions(mm)(Ø/LxBxH)	113x22x43	220x22x43	328x22x43	435x22x43
Tiltable	Yes	Yes	No	No
Shape	Rectangular	Rectangular	Rectangular	Rectangular

Line Diagram

Magnetic Track Light,
Magnetic Profile Light &
Magnetic Linear Spot Light



Photometric Details

Technical Specifications

Magnetic Linear Spot Light - Adjustable

Magnetic Hanging Spot Light - Small


Wattage	6W	24W	12W	24W
Product Code	VE-MLSLA-12	VE-MLSLA1-12	VE-MHSLS-12	VE-MHSLS-24
Nominal Input Voltage	48V DC	24V DC	24V DC	24V DC
Luminous Flux	540*	1080*	1620*	1080*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	24°	24°	24°	24°
Mounting	Track Mounted	Track Mounted	Track Mounted	Track Mounted
Fixture Color	Black	Black	Black	Black
Dimensions(mm)(Ø/LxBxH)	120x22x85	228x22x85	334x22x85	Ø55x165(H)
Tiltable	No	No	No	No
Shape	Rectangular	Rectangular	Rectangular	Cylindrical

Magnetic Hanging Spot Light - Large

Magnetic Linear Light - L Type

Wattage	12W	24W
Product Code	VE-MHSLL-12	VE-MLLLT-24
Nominal Input Voltage	24V DC	24V DC
Luminous Flux	1080*	2160*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20
Beam Angle	24°	120°
Mounting	Track Mounted	Track Mounted
Fixture Color	Black	Black
Dimensions(mm)(Ø/LxBxH)	Ø55x300(H)	300x22x43
Tiltable	No	No
Shape	Cylindrical	L-Shape

Line Diagram

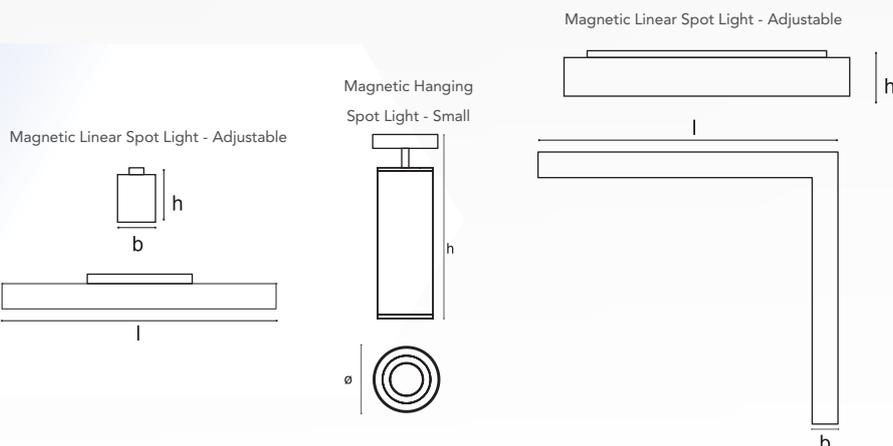



Zyro

LED Strip Light



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Zyro

LOW VOLTAGE INDOOR LED STRIPLIGHT

Low-voltage indoor LED strip lights offer a versatile, energy-efficient lighting solution. Their sleek, compact design enhances room ambiance while keeping power consumption low. Ideal for creative customization, they allow you to transform any indoor space with ease.

Luminaire Details


Product Name	: Zyro
Product Type	: Decorative Light
LED Type	: SMD
Fixture Type	: Surface Mounted
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Decorative Lighting
Source Brand	: Bridgelux/ Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

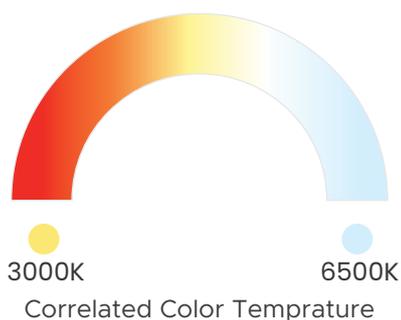

Ingress Protection
IP20

LM
79


LM
80

TM
21

Technical Specifications

* Applicable on 6500K/4000K/3000K

Wattage	4.8W/Meter	9.6W/Meter	14.4W/Meter
Product Code	ZYR-LSL-4.8	ZYR-LSL-9.6	ZYR-LSL-14.4
Nominal Input Voltage	12V DC	12V DC	12V DC
Luminous Flux	120*	120*	240*
Color Temperature	6500K/4000K/3000K/ Red/Green/Blue/Pink	6500K/4000K/3000K/ Red/Green/Blue/Pink	6500K/4000K/3000K/ Red/Green/Blue/Pink
CRI	≥80*	≥80*	≥80*
IP Rating	IP20	IP20	IP20
Beam Angle	120°	120°	120°
Dimensions (Length)	5 Meter	5 Meter	5 Meter



Photometric
Details



Avexa

Outdoor LED Strip Light



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Avexa

LOW VOLTAGE OUTDOOR LED STRIP LIGHT

Experience vibrant illumination and unlock your creativity with the IP65 Avexa LED Rope Light.

Luminaire Details


Product Name	: Avexa
Product Type	: Decorative Light
LED Type	: SMD
Fixture Type	: Surface Mounted
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Outdoor Decorative Lighting
Source Brand	: Bridgelux/ Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP65

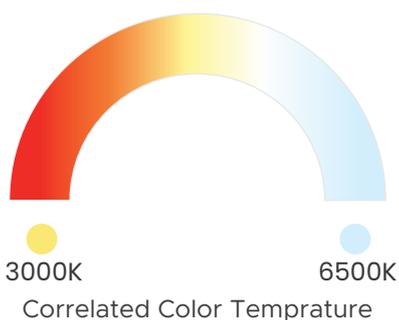

Ingress Protection
IP65

LM
79


LM
80

TM
21

Technical Specifications

* Applicable on 6500K/4000K/3000K

Wattage	4.8W/Meter	9.6W/Meter	14.4W/Meter
Product Code	AVX-OSL-4.8	AVX-OSL-9.6	AVX-OSL-14.4
Nominal Input Voltage	12V DC	12V DC	12V DC
Luminous Flux	120*	120*	240*
Color Temperature	6500K/4000K/3000K/ Red/Green/Blue/Pink	6500K/4000K/3000K/ Red/Green/Blue/Pink	6500K/4000K/3000K/ Red/Green/Blue/Pink
CRI	≥80*	≥80*	≥80*
IP Rating	IP65	IP65	IP65
Beam Angle	120°	120°	120°
Dimensions (Length)	5 Meter	5 Meter	5 Meter




Photometric
Details



Indoor Driver

INDOOR CV LED DRIVER



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Indoor Driver

Indoor CV LED Driver

Indoor Spot & Downlight LED drivers are engineered for reliable operation in homes, offices, public buildings, and retail spaces. With a lifetime of up to 30,000 hours, they are ideal for basic spotlight, downlight, and cove lighting applications.

Luminaire Details


Product Name	: Indoor Driver
Product Type	: CV LED Driver
Dimmable	: Non-Dimmable

Luminaire Housing

Body	: Metal/ PC
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20


Technical Specifications

Wattage	12V 2A	12V 4A	12V 5A	12V 6A
Product Code	ID-CV2A-12	ID-CV4A-12	ID-CV5A-12	ID-CV6A-12
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Output Voltage	12V	12V	240*	240*
Output Current	2A	4A	5A	6A
Type of Driver	Constant Voltage	Constant Voltage	Constant Voltage	Constant Voltage
P.F.	>0.95/LPF	>0.95/LPF	>0.95/LPF	>0.95/LPF
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
Surge Protection	IP20	IP20	IP20	IP20

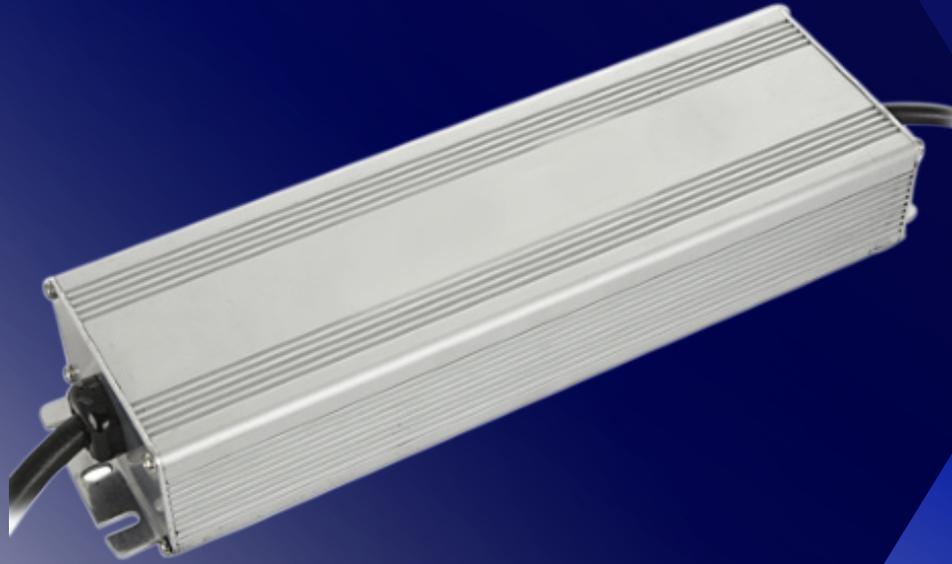

Outdoor Driver

OUTDOOR CV LED DRIVER



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA

Outdoor Driver

Outdoor CV LED Driver

Our robust LED drivers are built to withstand high temperatures, over-voltages, strong vibrations, dust, moisture, and surges up to 4KV, all while delivering a lifetime of over 50,000 hours. The fixed-current range offers exceptionally reliable, low-failure drivers that ensure long-term performance and confidence.

Luminaire Details

Product Name	: Outdoor Driver
Product Type	: CV LED Driver
Dimmable	: Non-Dimmable

Luminaire Housing


Body	: Metal/ PC
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP65

Technical Specifications

Wattage	12V 2A	12V 4A	12V 5A	12V 6A
Product Code	OD-CV2A-12	OD-CV4A-12	OD-CV5A-12	OD-CV6A-12
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Output Voltage	12V	12V	240*	240*
Output Current	2A	4A	5A	6A
Type of Driver	Constant Voltage	Constant Voltage	Constant Voltage	Constant Voltage
P.F.	>0.95/LPF	>0.95/LPF	>0.95/LPF	>0.95/LPF
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
Surge Protection	IP65	IP65	IP65	IP65

Infinite

*CURVE SUSPENDED
LINEAR LIGHT*



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Infinite

Curve Suspended Linear Light

This contemporary aerial luminaire enhances any space with its unique wave-inspired design. Crafted from lightweight extruded aluminium, it offers smooth, uniform light distribution and easy installation. Its sleek, minimal form adds a striking yet elegant ambiance to modern interiors.

Luminaire Details


Product Name	: Infinite
Product Type	: SMD Linear Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

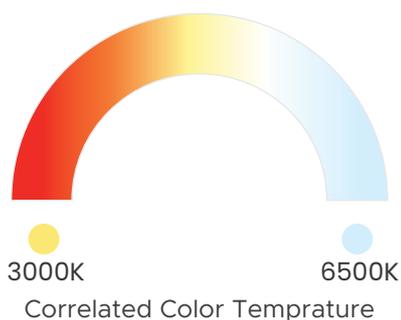

Ingress Protection
IP20

LM
79



LM
80

TM
21


Technical Specifications

Wattage	20W	40W	50W	60W
Product Code	INT-CSLL-20	INT-CSLL-40	INT-CSLL-50	INT-CSLL-60
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1800*	3600*	4500*	5400*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.9	>0.9	>0.9	>0.9
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Suspended	Suspended	Suspended	Suspended
Fixture Color	White/Black	White/Black	White/Black	White/Black
Dimensions(mm)(LxBxH)	600x50x70	1200x50x70	1500x50x70	1800x50x70
Shape	Curve Linear	Curve Linear	Curve Linear	Curve Linear

Line Diagram

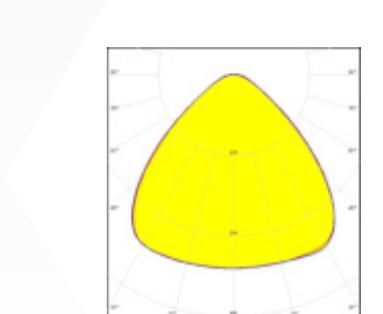
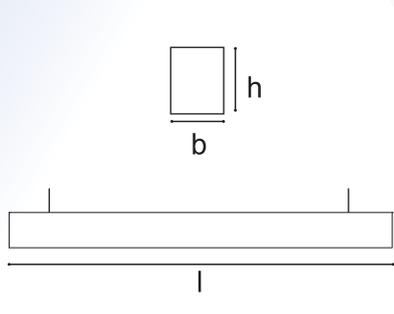


Photometric Details

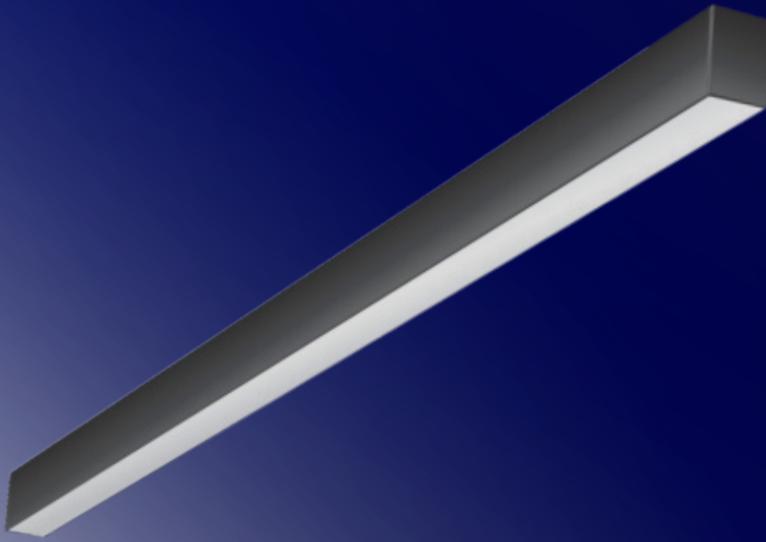

Zevo-50

*SUSPENDED
LINEAR LIGHT*



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Zevo-50

SUSPENDED LINEAR LIGHT

This distinctive LED pendant light features a slim aluminium profile that delivers clean, continuous lines and clear illumination for commercial, hospitality, and residential spaces. Its modern high-efficiency LEDs and refined design ensure an excellent light-output-to-power ratio.

Luminaire Details


Product Name	: Zevo-50
Product Type	: SMD Linear Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

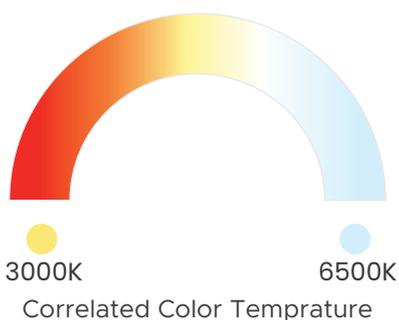

Ingress Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	20W	40W	50W	60W
Product Code	ZVO-SLL50-20	ZVO-SLL50-40	ZVO-SLL50-50	ZVO-SLL50-60
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1800*	3600*	4500*	5400*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Suspended	Suspended	Suspended	Suspended
Fixture Color	White/Black	White/Black	White/Black	White/Black
Dimensions(mm)(Ø)	600x50x70	1200x50x70	1500x50x70	1800x50x70
Shape	Linear	Linear	Linear	Linear

Wattage	80W
Product Code	ZVO-SLL50-80
Nominal Input Voltage	240V AC, 50Hz
Luminous Flux	7200*
Color Temperature	6500K/4000K/3000K
CRI	≥80
P.F.	>0.95
THD	<10%
Surge Protection	Up to 4KV
IP Rating	IP20
Beam Angle	120°
Mounting	Suspended
Fixture Color	White/Black
Dimensions(mm)(Ø)	2400x50x70
Shape	Linear

Line Diagram


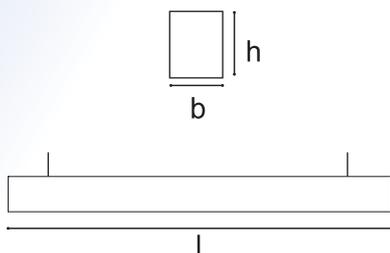


Photometric Details



Syra-50

*UP & DOWN SUSPENDED
LINEAR LIGHT*



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Syra-50

SUSPENDED LINEAR LIGHT

This distinctive up-down LED pendant light delivers a 70:30 split between direct illumination below and ambient glow above. Its sleek suspended design provides clean lines and clear, balanced light, ideal for commercial, hospitality, and residential interiors.

Luminaire Details


Product Name	: Syra-50
Product Type	: SMD Linear Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

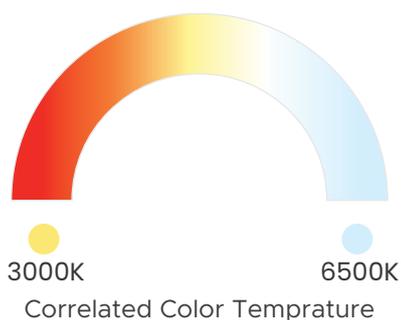

Ingress Protection
IP20

LM
79



LM
80

TM
21


Technical Specifications

Wattage	20W(15W+5W)	40W(30W+10W)	60(45W+15W)	80W(60W+20W)
Product Code	SYA50-15+5	SYA50-30+10	SYA50-45+15	SYA50-60+20
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1800*	3600*	5400*	7200*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Suspended	Suspended	Suspended	Suspended
Fixture Color	White/Black	White/Black	White/Black	White/Black
Light (Up & Down)	Yes	Yes	Yes	Yes
Dimensions(mm)(LxBxH)	600x50x70	1200x50x70	1800x50x70	2400x50x70
Shape	Linear	Linear	Linear	Linear

Line Diagram


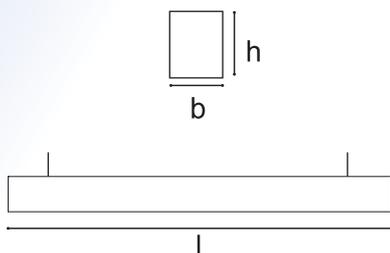


Photometric Details

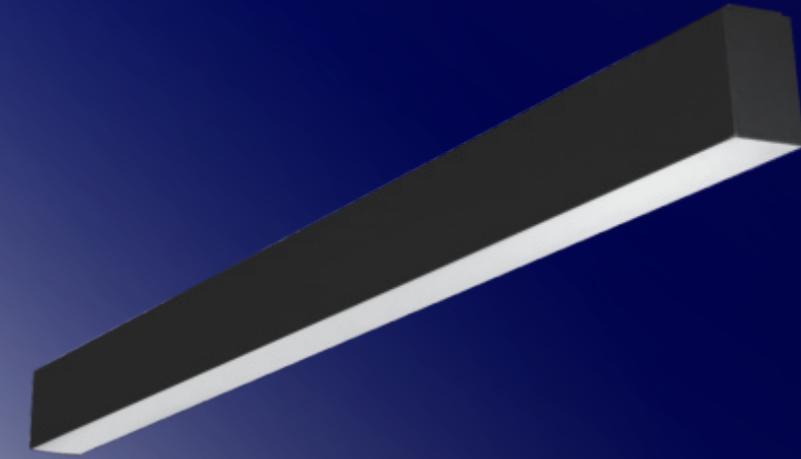

Zevo-70

*SUSPENDED
LINEAR LIGHT*



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Zevo-70

SUSPENDED LINEAR LIGHT

This distinctive LED pendant light features a slim aluminium profile that delivers clean, continuous lines and clear illumination for commercial, hospitality, and residential spaces. Its modern high-efficiency LEDs and refined design ensure an excellent light-output-to-power ratio.

Luminaire Details


Product Name	: Zevo-70
Product Type	: SMD Linear Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

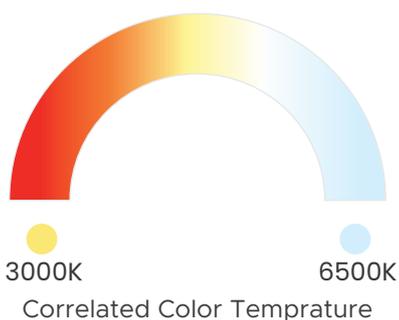

Ingress Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	20W	40W	50W	60W
Product Code	ZVO-SLL70-20	ZVO-SLL70-40	ZVO-SLL70-50	ZVO-SLL70-60
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1800*	3600*	4500*	5400*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Suspended	Suspended	Suspended	Suspended
Fixture Color	White/Black	White/Black	White/Black	White/Black
Dimensions(mm)(LxBxH)	600x70x75	1200x70x75	1500x70x75	1800x70x75
Shape	Linear	Linear	Linear	Linear

Wattage	80W
Product Code	ZVO-SLL70-80
Nominal Input Voltage	240V AC, 50Hz
Luminous Flux	7200*
Color Temperature	6500K/4000K/3000K
CRI	≥80
P.F.	>0.95
THD	<10%
Surge Protection	Up to 4KV
IP Rating	IP20
Beam Angle	120°
Mounting	Suspended
Fixture Color	White/Black
Dimensions(mm)(Ø)	2400x70x75
Shape	Linear

Line Diagram

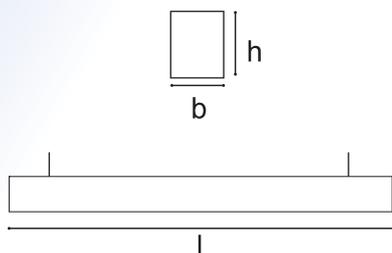


Photometric Details



Syra-70

UP & DOWN SUSPENDED
LINEAR LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Syra-70

SUSPENDED LINEAR LIGHT

This distinctive up-down LED pendant light delivers a 70:30 split between direct illumination below and ambient glow above. Its sleek suspended design provides clean lines and clear, balanced light, ideal for commercial, hospitality, and residential interiors.

Luminaire Details


Product Name	: Syra-70
Product Type	: SMD Linear Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

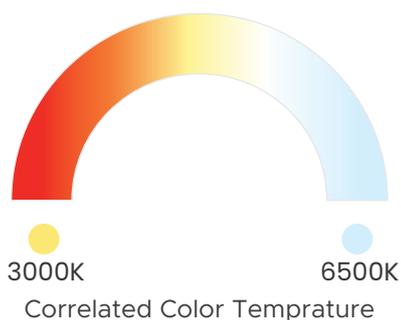

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	20W(15W+5W)	40W(30W+10W)	60(45W+15W)	80W(60W+20W)
Product Code	SYA70-15+5	SYA70-30+10	SYA70-45+15	SYA70-60+20
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1800*	3600*	5400*	7200*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Suspended	Suspended	Suspended	Suspended
Fixture Color	White/Black	White/Black	White/Black	White/Black
Light (Up & Down)	Yes	Yes	Yes	Yes
Dimensions(mm)(LxBxH)	600x70x100	1200x70x100	1800x70x100	2400x70x100
Shape	Linear	Linear	Linear	Linear

Line Diagram


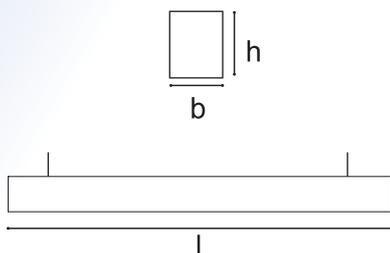


Photometric Details



Avioris

SUSPENDED
LINEAR LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Avioris

SUSPENDED LINEAR SPOT LIGHT

The Suspended Linear Spot Light features an extruded aluminium body with high-efficiency SMD LEDs and reflectors for bright, low-glare illumination. Available in white or black powder coating, with custom colours on request, it supports suspended mounting and dimmable drivers for adaptable lighting control. Optional dummy diffusers can be added between LED modules to achieve a distinctive designer look.

Luminaire Details


Product Name	: Avioris
Product Type	: Linear Spot Light
LED Type	: SMD / COB
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector	: Yes
Diffuser Type	: No/Prismatic
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

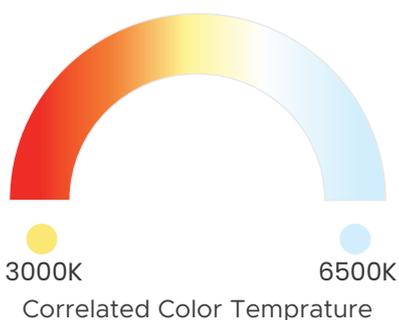

Ingress Protection
IP20

LM
79


LM
80

TM
21

Technical Specifications

Wattage	30W
Product Code	AVS-SLSL1-30
Nominal Input Voltage	240V AC, 50Hz
Luminous Flux	2700*
Color Temperature	6500K/4000K/3000K
CRI	≥80
P.F.	>0.95
THD	<10%
Surge Protection	Up to 4KV
IP Rating	IP20
Mounting	Suspended
Fixture Color	White/Black
Dimensions(mm)(LxBxH)	1200x50x70
Shape	Linear



Line Diagram

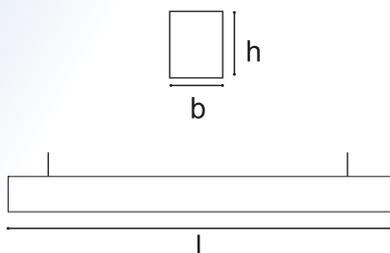



Elvion

RECESSED
LINEAR LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA

Elvion

Recessed Linear Light

The Cameo Recessed Linear Light features a powder-coated extruded aluminium profile with trim for seamless recess mounting. An opal diffuser ensures uniform illumination, while joineries allow smooth connection between profiles to achieve custom lighting designs. Ideal for offices, institutes, and design-focused spaces with false ceilings.

Luminaire Details


Product Name	: Elvion
Product Type	: SMD Linear Light
LED Type	: SMD
Fixture Type	: Recessed
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

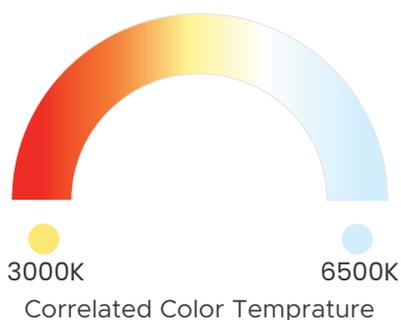

Ingress Protection
IP20

LM
79

LM
80



TM
21

Technical Specifications

Wattage	20W	40W	50W	60W
Product Code	ELV-RLL-20	ELV-RLL-40	ELV-RLL-50	ELV-RLL-60
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1800*	3600*	4500*	5400*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.955	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Recessed	Recessed	Recessed	Recessed
Fixture Color	White/Black	White/Black	White/Black	White/Black
Dimensions(mm)(LxBxH)	600x50x35	1200x50x35	1500x50x35	1800x50x35
Shape	Linear	Linear	Linear	Linear

Wattage	80W
Product Code	ELV-RLL-80
Nominal Input Voltage	240V AC, 50Hz
Luminous Flux	1800*
Color Temperature	6500K/4000K/3000K
CRI	≥80
P.F.	>0.95
THD	<10%
Surge Protection	Up to 4KV
IP Rating	IP20
Beam Angle	120°
Mounting	Recessed
Fixture Color	White/Black
Dimensions(mm)(Ø)	2400x50x35
Shape	Linear

Line Diagram

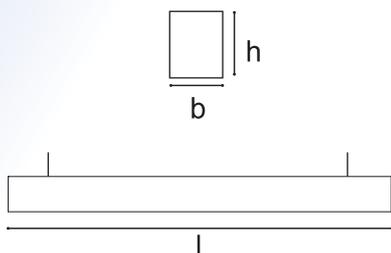

Photometric Details



Zenith

SUSPENDED DRUM LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Zenith

SUSPENDED DRUM LIGHT

The Zenith Suspended Drum Light features an aluminium body with an opal diffuser, offering a bright and elegant illumination. Popular for its clean form and efficient SMD LED performance, it comes in black and white with multiple radius options, with custom colours available on request. Suspended by three wires for secure mounting, it delivers both striking aesthetics and reliable light output.

Luminaire Details


Product Name	: Zenith
Product Type	: SMD Drum Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

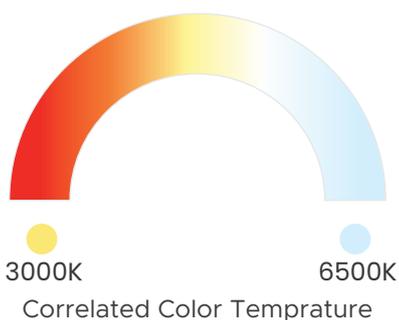

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	30W	40W	60W	80W
Product Code	ZNT-SDL-30	ZNT-SDL-40	ZNT-SDL-60	ZNT-SDL-80
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2500*	3400*	5100*	6800*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Suspended	Suspended	Suspended	Suspended
Fixture Color	White/Black	White/Black	White/Black	White/Black
Dimensions(mm)(Øxh)	450x62	600x62	750x62	900x62
Shape	Circular	Circular	Circular	Circular

Line Diagram



Photometric Details



Arena

SUSPENDED RING LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Arena

SUSPENDED RING LIGHT

Arena Suspended Ring Light is manufactured with Aluminium material and opal diffuser having high quality powder coating finish for premium look. Wide lighting width for lighting and hollow space in the centre gives a very elegant look to overall luminaire. Powder coating not only enhances the aesthetic but also add durability. It's designed to provide evenly diffused light and promising well-lit space. It's suitable for Office, Restaurant, Hotels, Gyms etc.

Luminaire Details


Product Name	: Arena
Product Type	: SMD Ring Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

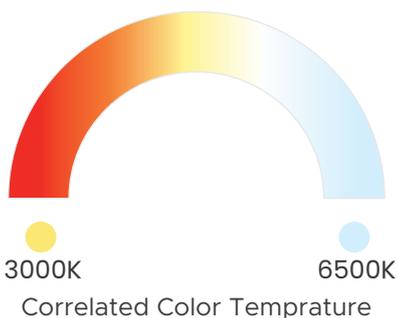

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	30W	40W	60W	80W
Product Code	ARA-SRL-30	ARA-SRL-40	ARA-SRL-60	ARA-SRL-80
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2700*	3600*	5400*	7200*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Suspended	Suspended	Suspended	Suspended
Fixture Color	White/Black	White/Black	White/Black	White/Black
Dimensions(mm)	Overall Dia(Ø): 450 Litup Width(b): 50 Height(h): 70	Overall Dia(Ø): 600 Litup Width(b): 50 Height(h): 70	Overall Dia(Ø): 750 Litup Width(b): 50 Height(h): 70	Overall Dia(Ø): 900 Litup Width(b): 50 Height(h): 70
Shape	Ring	Ring	Ring	Ring

Line Diagram




Photometric Details



Trivex

SUSPENDED TRIANGLE LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA

Trivex

SUSPENDED TRIANGLE LIGHT

The TRIVEX Suspended Triangle Light adds a striking architectural accent while remaining easy to install and maintenance-friendly. Its elegant, unique design features a ceiling-mounted canopy that houses the LED driver and supports three suspension wires. Available in multiple sizes, it delivers uniform illumination through an opal diffuser and is ideal for offices, malls, institutes, showrooms, and gyms.

Luminaire Details


Product Name	: Trivex
Product Type	: SMD Triangle Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

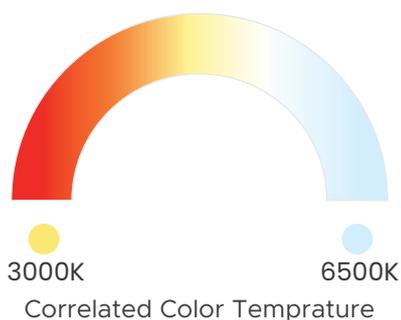

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	30W	40W
Product Code	TRX-STL-30	TRX-STL-40
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2550*	3400*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20
Beam Angle	120°	120°
Mounting	Suspended	Suspended
Fixture Color	White/Black	White/Black
Dimensions(mm)(l x h)	450(each arm)x72	600(each arm)x72
Shape	Triangle	Triangle

Line Diagram




Photometric Details



Hexion-D

SUSPENDED HEXAGONAL
DRUM LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE




RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA

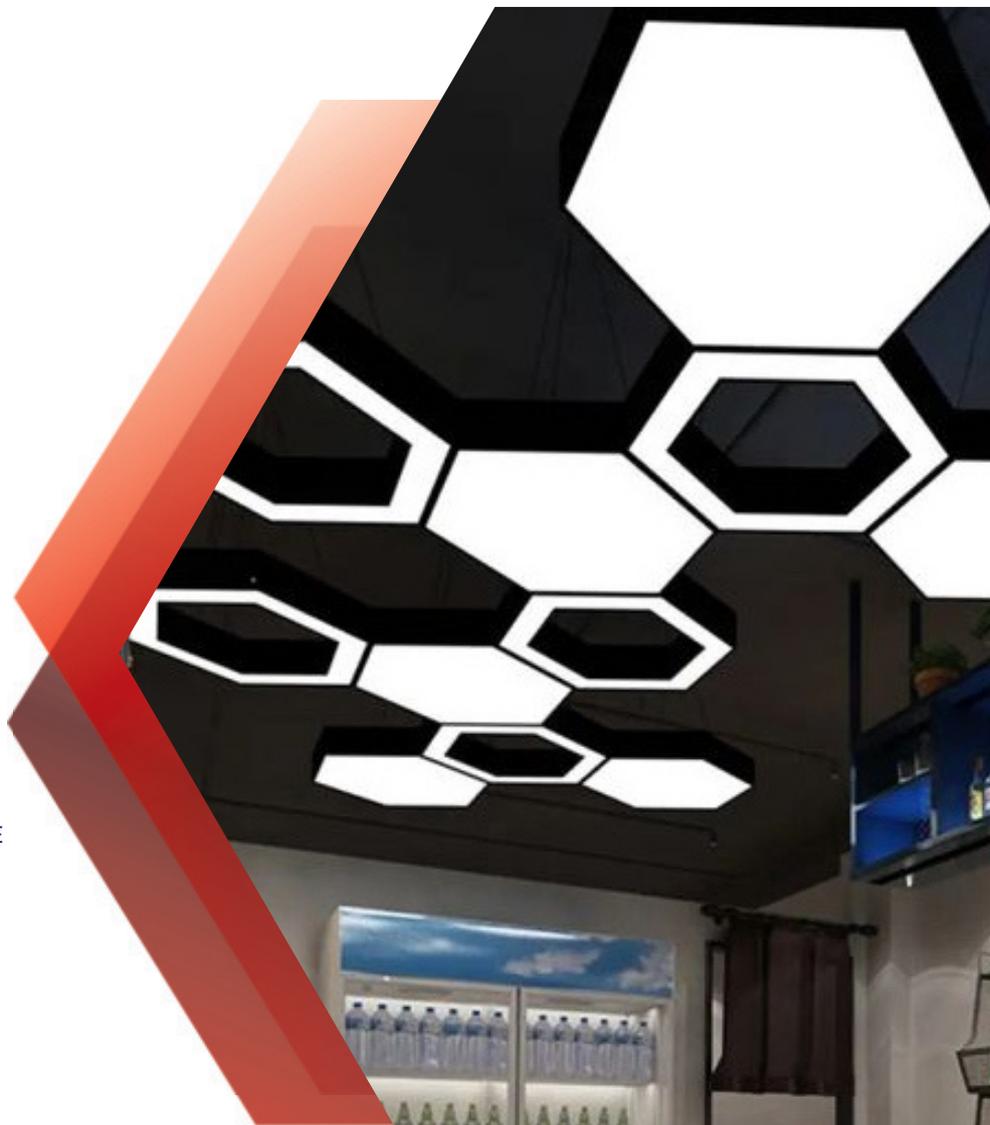

Hexion-D

SUSPENDED HEXAGONAL DRUM LIGHT

The HEXION-D Suspended Hexagonal Drum Light is a perfect choice for creative, architectural lighting in modern spaces. Crafted from aluminium with premium milky diffusers, it delivers even, work-friendly illumination while saving energy. Available in multiple sizes and a range of powder-coated finishes to suit design requirements.

Luminaire Details


Product Name	: Hexion-D
Product Type	: Suspended Hexagonal Drum Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

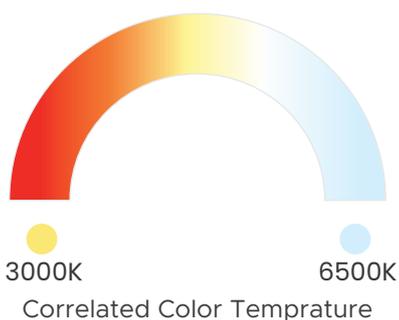

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	40W	80W
Product Code	HXN-SHDL-40	HXN-SHDL-80
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	3400*	6800*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20
Beam Angle	120°	120°
Mounting	Suspended	Suspended
Fixture Color	White/Black	White/Black
Dimensions(mm)(LxH)	300(each arm)x72	600(each arm)x72
Shape	Hexagonal Drum	Hexagonal Drum

Line Diagram

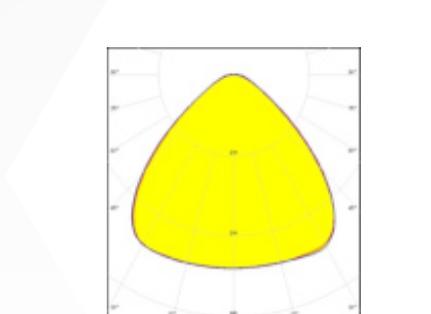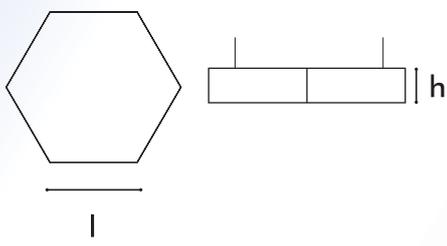


Photometric Details



Hexion-R

SUSPENDED HEXAGONAL
RING LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Hexion-R

SUSPENDED HEXAGONAL RING LIGHT

HEXION-R is a suspended hexagonal ring light designed for modern offices and design-led spaces. Crafted from aluminium with a milky diffuser, it delivers smooth, soothing illumination. Suitable for single or grouped installations, it is available in multiple sizes and powder-coated finishes, with white and black as standard.

Luminaire Details


Product Name	: Hexion-R
Product Type	: Suspended Hexagonal Ring Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

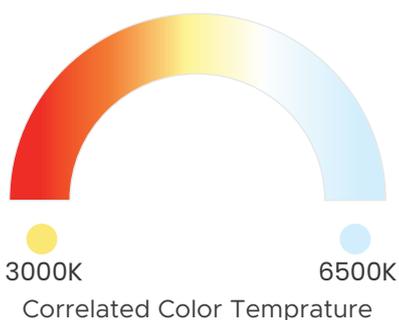

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	40W	80W
Product Code	HXNR-SHRL-40	HXNR-SHRL-80
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	3400*	6800*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20
Beam Angle	120°	120°
Mounting	Suspended	Suspended
Fixture Color	White/Black	White/Black
Dimensions(mm)(LxBxH)	300(each arm)x50x72	600(each arm)x50x72
Shape	Hexagonal Ring	Hexagonal Ring

Line Diagram

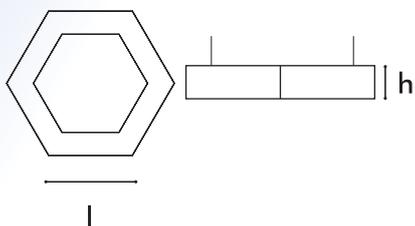

Photometric Details

Our Presence



BELDON LIGHTING INDIA PVT. LTD.

H.O. Beldon Lighting India Pvt. Ltd.

106, First Floor, Shalom CHS, Yagnik Nagar, Amboli, Andheri West, Mumbai - 400058.

North

Noida Factory

1/9/6A, Sector 41, Aghapur Industrial Estate, Noida, Uttar Pradesh - 201301.

Ghaziabad Office

C118 Tower 18 Gulmohar Green, Mohan Nagar, Ghaziabad near Hindon Air Force, Uttar Pradesh -201005

South

Bangalore Office

1703 C Wing Juniper Building, Sattva Greenage #7 Hosur Road, Bengaluru Karnataka - 560068

West

Head Office

106, First Floor, Shalom CHS, Yagnik Nagar, Amboli, Andheri West, Mumbai: 400058.

Pune Branch Office

Gate No-92/2, Vakhar Mahamandal, Wadh mukhwadi, Mohan Nagar, Bhosari, Pune-411039

Gujarat Office

World Trade Tower Makarba Ahmedabad, Gujarat - 382210

Glimpse of Our Product Range



Industrial Luminaires



Reliant
Highbay



Aristo
Modular Highbay



Clipsal



Vega



Dior
Well Glass



Brillux
Flameproof

Outdoor Luminaires




Flux



Elara



Alloy

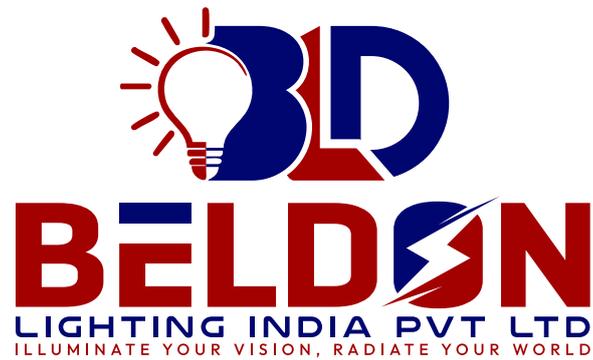

CONTACT US

Head Office:

106, First Floor, Shalom CHS,
Yagnik Nagar, Amboli,
Andheri West, Mumbai - 400058.

Toll Free No.:

18008911876

Mail:

sales@beldonlighting.com
info@beldonlighting.com

www.beldonlighting.com