


Novion

ALUMINIUM LED BATTEN



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA

Novion

Aluminium Led Batten

A sleek, seamless extruded aluminium LED batten designed for workspaces and retail environments. Its high-efficiency housing and 120° polycarbonate diffuser ensure optimum performance and uniform, glare-free illumination.

Luminaire Details


Product Name	: Novion
Product Type	: SMD Batten
LED Type	: SMD
Fixture Type	: Surface Mount
Dimmable	: No

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Extruded Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

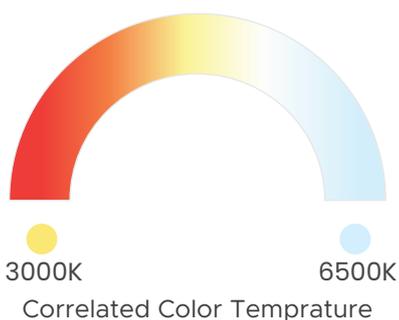

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	20W	22W	40W
Product Code	NVN-ALB-20	NVN-ALB-22	NVN-ALB-40
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2000*	2200*	4000*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%
Surge Protection	4KV	4KV	4KV
IP Rating	IP20	IP20	IP20
Beam Angle	120°	120°	36°
Mounting	Surface	Surface	Surface
Fixture Color	Anodized	Anodized	Anodized
Dimensions(mm)(LxBxH)	1125x21x36	1175x21x36	1170 X 21 x 36

Line Diagram



Photometric Details