


Outdoor Driver

OUTDOOR CV LED DRIVER



Application Areas



OFFICES



BANKS



HEALTHCARE




RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA

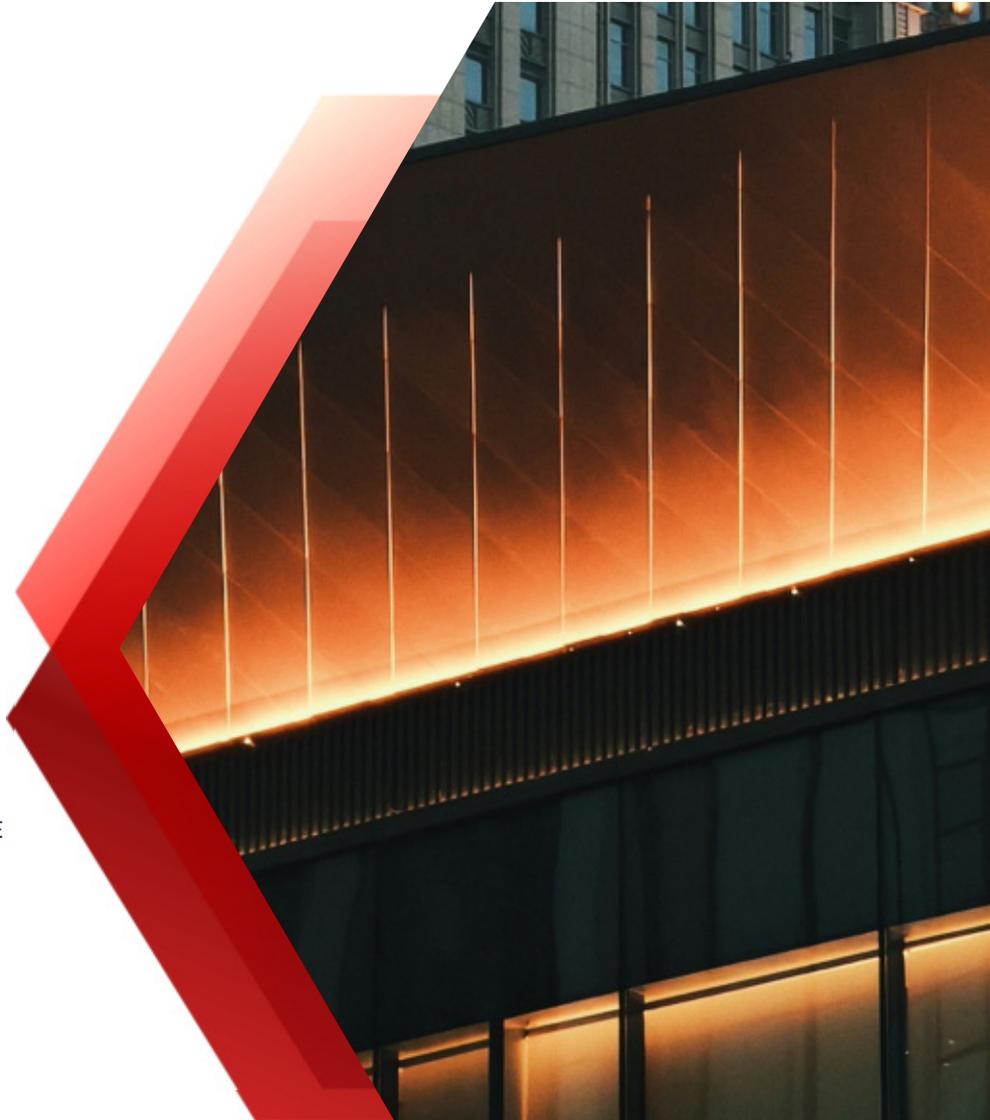

Outdoor Driver

Outdoor CV LED Driver

Our robust LED drivers are built to withstand high temperatures, over-voltages, strong vibrations, dust, moisture, and surges up to 4KV, all while delivering a lifetime of over 50,000 hours. The fixed-current range offers exceptionally reliable, low-failure drivers that ensure long-term performance and confidence.

Luminaire Details

Product Name	: Outdoor Driver
Product Type	: CV LED Driver
Dimmable	: Non-Dimmable

Luminaire Housing

Body	: Metal/ PC
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP65

Technical Specifications

Wattage	12V 2A	12V 4A	12V 5A	12V 6A
Product Code	OD-CV2A-12	OD-CV4A-12	OD-CV5A-12	OD-CV6A-12
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Output Voltage	12V	12V	240*	240*
Output Current	2A	4A	5A	6A
Type of Driver	Constant Voltage	Constant Voltage	Constant Voltage	Constant Voltage
P.F.	>0.95/LPF	>0.95/LPF	>0.95/LPF	>0.95/LPF
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
Surge Protection	IP65	IP65	IP65	IP65