




# Syra-70

UP & DOWN SUSPENDED  
LINEAR LIGHT



## Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL  
INSTITUTE



COMMON  
AREA



# Syra-70

## SUSPENDED LINEAR LIGHT

This distinctive up-down LED pendant light delivers a 70:30 split between direct illumination below and ambient glow above. Its sleek suspended design provides clean lines and clear, balanced light, ideal for commercial, hospitality, and residential interiors.

### Luminaire Details


Product Name	: Syra-70
Product Type	: SMD Linear Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

### Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

### Luminaire Housing

Body	: Extruded Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

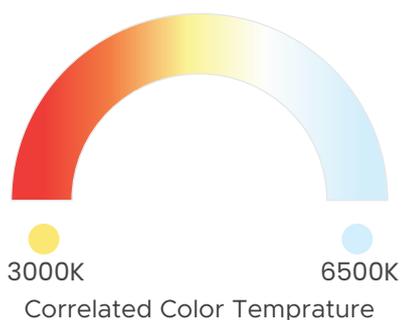

Ingress Protection  
**IP20**

**LM**  
**79**



**LM**  
**80**

**TM**  
**21**

# Technical Specifications

Wattage	20W(15W+5W)	40W(30W+10W)	60(45W+15W)	80W(60W+20W)
Product Code	SYA70-15+5	SYA70-30+10	SYA70-45+15	SYA70-60+20
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1800*	3600*	5400*	7200*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥80	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20	IP20	IP20
Beam Angle	120°	120°	120°	120°
Mounting	Suspended	Suspended	Suspended	Suspended
Fixture Color	White/Black	White/Black	White/Black	White/Black
Light (Up & Down)	Yes	Yes	Yes	Yes
Dimensions(mm)(LxBxH)	600x70x100	1200x70x100	1800x70x100	2400x70x100
Shape	Linear	Linear	Linear	Linear

Line Diagram

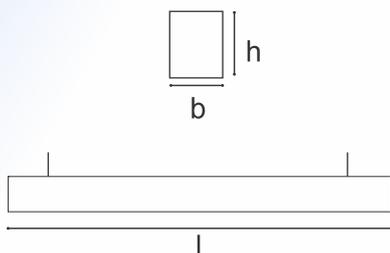

Photometric Details