



Trivex

SUSPENDED TRIANGLE LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Trivex

SUSPENDED TRIANGLE LIGHT

The TRIVEX Suspended Triangle Light adds a striking architectural accent while remaining easy to install and maintenance-friendly. Its elegant, unique design features a ceiling-mounted canopy that houses the LED driver and supports three suspension wires. Available in multiple sizes, it delivers uniform illumination through an opal diffuser and is ideal for offices, malls, institutes, showrooms, and gyms.

Luminaire Details


Product Name	: Trivex
Product Type	: SMD Triangle Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

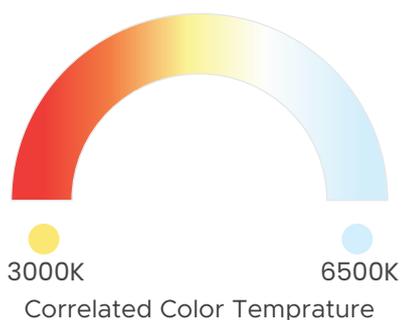

Ingress Protection
IP20

LM
79



LM
80

TM
21

Technical Specifications

Wattage	30W	40W
Product Code	TRX-STL-30	TRX-STL-40
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	2550*	3400*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20
Beam Angle	120°	120°
Mounting	Suspended	Suspended
Fixture Color	White/Black	White/Black
Dimensions(mm)(l x h)	450(each arm)x72	600(each arm)x72
Shape	Triangle	Triangle

Line Diagram



Photometric Details