



Dazzle

LED FLOOD LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Dazzle

LED Flood Light

DAZZLE is a robust, long-lasting flood light engineered with a corrosion-proof die-cast aluminium housing. Designed for reliable outdoor performance, it delivers powerful illumination while ensuring excellent thermal management and durability in demanding environments.

Luminaire Details


Product Name	: Dazzle
Product Type	: LED Flood Light
LED Type	: SMD
Fixture Type	: Surface/Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

Luminaire Source Details

Light Emission	: Outdoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die-Cast Aluminium
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP66
Emergency Compatibility	: No

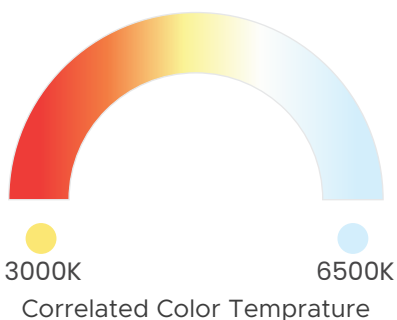

Ingress Protection
IP66

LM
79


LM
80

TM
21

Technical Specifications

Wattage	50W	100W	200W
Product Code	DZZ-LFL-50	DZZ-LFL-100	DZZ-LFL-200
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	6000	12000	24000
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80	≥80
P.F.	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%
Surge Protection	Up to 6KV	Up to 6KV	Up to 6KV
IP Rating	IP66	IP66	IP66
Beam Angle	120°	120°	120°
Mounting	Recess	Recess	Recess
Fixture Color	White	White	White
Cutout(mm)(ø)	110	110	145
Dimensions(mm)(lXbXh)	200x39x158	274x39x200	340x44x250

Line Diagram



Photometric Details