




Nylo

DOWN AND
UP & DOWN LIGHT

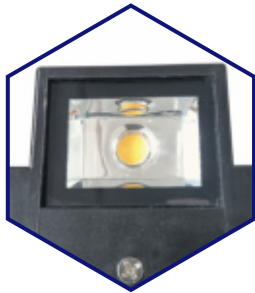

Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Nylo

Down and UP & Down Light

Up-and-down wall sconces add a classy, modern touch to home exteriors. Crafted from die-cast aluminium, they ensure excellent heat dissipation and long-lasting performance.

Luminaire Details


| | |
|--------------|------------------|
| Product Name | : Nylo |
| Product Type | : COB Wall Light |
| LED Type | : COB |
| Fixture Type | : Surface Mount |
| Dimmable | : No |

Luminaire Source Details

| | |
|----------------|--------------------------|
| Light Emission | : Outdoor Focus Lighting |
| Source Brand | : Bridgelux / CITIZEN |
| CRI | : ≥80 |
| McAdam Binning | : Step 5 |

Luminaire Housing

| | |
|-----------------------|----------------------|
| Body | : Die-Cast Aluminium |
| Reflector | : Yes |
| Diffuser Type | : Clear |
| Operating Temperature | : -10° to 50° C |
| Humidity | : RH 10-90 % |
| IP Rating | : IP65 |

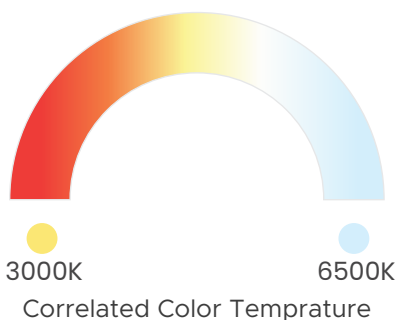

Ingress Protection
IP65

LM
79



LM
80

TM
21

Technical Specifications

| Wattage | 5W | 10W (5W+5W) |
|-----------------------|-------------------|-------------------|
| Product Code | NYO-DL-05 | NYO-UDL-10 |
| Nominal Input Voltage | 240V AC, 50Hz | 240V AC, 50Hz |
| Luminous Flux | 400* | 800* |
| Color Temperature | 6500K/4000K/3000K | 6500K/4000K/3000K |
| CRI | ≥80 | ≥80 |
| P.F. | >0.95 | >0.95 |
| THD | <10% | <10% |
| Surge Protection | Up to 4KV | Up to 4KV |
| IP Rating | IP65 | IP65 |
| Beam Angle | 45° | 45° |
| Mounting | Surface | Surface |
| Fixture Color | Black | Black |
| Dimensions(mm)(lXbXh) | 75x81x63 | 144x79x64 |
| Shape | K Shape | K Shape |

Line Diagram

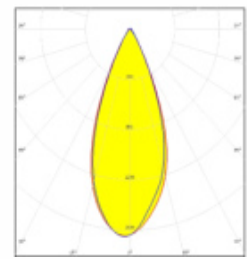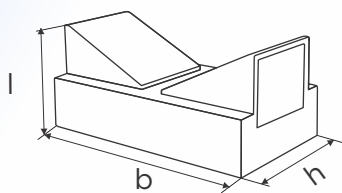

Photometric Details