



Xylo



*DOWN AND
UP & DOWN LIGHT*



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Xylo

Down and UP & Down Light

A cylinder-style IP65 up-down wall luminaire made from high-grade aluminium with an integrated heatsink for excellent thermal management. Equipped with a high-efficiency COB and reflector, it delivers strong, well-controlled light. Available in single- or dual-direction output, it also features a clear front glass panel for a clean, premium finish.

Luminaire Details


Product Name	: Xylo
Product Type	: COB Wall Light
LED Type	: COB
Fixture Type	: Surface Mount
Dimmable	: No

Luminaire Source Details

Light Emission	: Outdoor Focus Lighting
Source Brand	: Bridgelux / CITIZEN
CRI	: ≥80
McAdam Binning	: Step 5

Luminaire Housing

Body	: Aluminium
Reflector	: Yes
Diffuser Type	: Clear
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP65

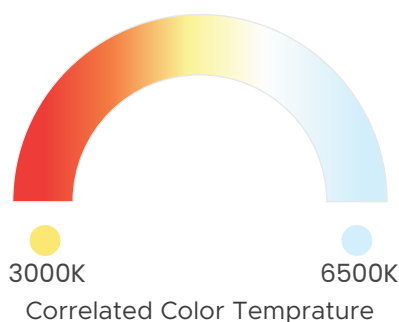

Ingress
Protection
IP65

LM
79

LM
80



TM
21

Technical Specifications

Wattage	1X6W	1X10W	1X15W	2X6W
Product Code	XYO-DL-1X6	XYO-DL-1X10	XYO-DL-1X15	XYO-UDL-2X6
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	540*	900*	1350*	1080*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/ 3000K
CRI	≥70	≥70	≥70	≥70
P.F.	>0.9	>0.9	>0.9	>0.9
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP65	Ip65	IP65	IP65
Beam Angle	24°/40°/60°	24°/40°/60°	24°/40°/60°	24°/40°/60°
Mounting	Surface	Surface	Surface	Surface
Fixture Color	Black/Grey	Black/Grey	Black/Grey	Black/Grey
Dimensions(mm)(LxØ)	150x50	150x60	150x80	150x50
Shape	Round	Round	Round	Round

Wattage	2X10W	2X15W
Product Code	XYO-UDL-2X10	XYO-UDL-2X15
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	1800*	2700*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥70	≥70
P.F.	>0.9	>0.9
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP65	IP65
Beam Angle	24°/40°/60°	24°/40°/60°
Mounting	Surface	Surface
Fixture Color	Black/Grey	Black/Grey
Dimensions(mm)(LxØ)	170x60	195x80
Shape	Round	Round

Line
Diagram

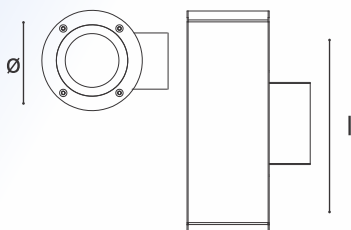

Photometric
Details