





Lunar-S

LED STEP LIGHT



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Lunar-S

LED Step Light

LUNAR-S square steplight features high-efficiency LEDs housed in a durable die-cast aluminium body with clear glass, delivering uniform light distribution and reliable performance.

Luminaire Details


Product Name	: Lunar-S
Product Type	: LED Step Light
LED Type	: SMD
Fixture Type	: Wall Recess

Luminaire Source Details

Light Emission	: Indoor/ Outdoor Step Light
Source Brand	: Bridgelux/ Seoul
CRI	: ≥70
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die Cast Aluminium
Reflector	: N/A
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP65

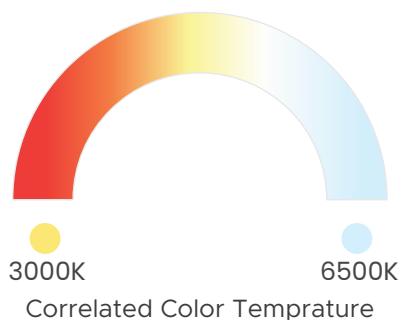

Ingress
Protection
IP65

LM
79



LM
80

TM
21

Technical Specifications

Wattage	3W
Product Code	LNRS-STL-3
Nominal Input Voltage	240V AC, 50Hz
Luminous Flux	300
Color Temperature	6500K/4000K/3000K
CRI	≥70
P.F.	>0.9
THD	<20%
Surge Protection	Up to 4KV
IP Rating	IP65
Beam Angle	30°
Secondary Optics (Lens)	Yes
Mounting	Wall Recess
Fixture Color	Grey
Cutout(mm)(LxB)	110x110
Dimensions(mm)(LxBxH)	125x125x40
Shape	Square

Line Diagram

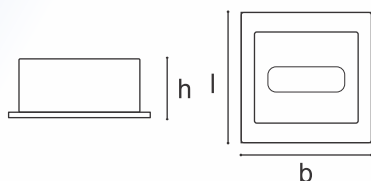

Photometric Details