

Square - Flat Top



Pyramid



Round - Flat Top



Flower



Centre Ring





Side Ring



Double Side Ring

Meteor

LED POST TOP



Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL
INSTITUTE



COMMON
AREA



Meteor

LED Post Top

METEOR is a pole-mounted post-top luminaire designed for outdoor and landscape applications. Built with powder-coated die-cast and spun aluminium with clear or opal diffuser, it offers IP65 protection and excellent optical control. Its classic form with modern lines makes it an elegant alternative to standard area fixtures.

Luminaire Details


Product Name	: Meteor
Product Type	: Post Top
LED Type	: SMD
Fixture Type	: Pole Mounted

Luminaire Source Details

Light Emission	: Outdoor Lighting
Source Brand	: CREE/ OSRAM/ Bridgelux/ Seoul
CRI	: ≥70
McAdam Binning	: Step 5

Luminaire Housing

Body	: Die Cast Aluminium
Reflector	: Clear - Toughened Glass/PC
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP65

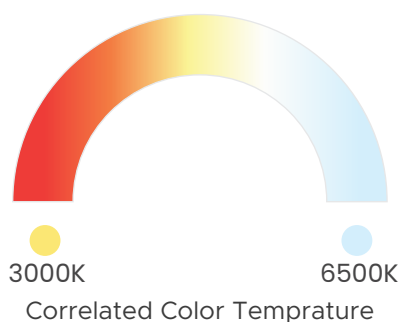

Ingress
Protection
IP65

LM
79

LM
80


TM
21

Technical Specifications

Wattage	E27	E27	12W	12W
Product Code	MTR-PST-E27-1	MTR-PST-E27-2	MTR-PST-12-1	MTR-PST-12-2
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	N/A	N/A	960	960
Color Temperature	N/A	N/A	6500K/4000K/3000K	6500K/4000K/3000K
CRI	N/A	N/A	≥70	≥70
P.F.	N/A	N/A	>0.95	>0.95
THD	N/A	N/A	<10%	<10%
Surge Protection	N/A	N/A	Up to 4KV	Up to 4KV
IP Rating	IP65	IP65	IP65	IP65
Secondary Optics (Lens)	No	No	No	No
Mounting	Pipe Pole	Pipe Pole	Pipe/ Pole	Pipe/ Pole
Fixture Color	Black	Black	Black	Black
Dimensions(mm)(B/ØxH)	Ø210x220	Ø150x180	Ø220x225	Ø220x235
Shape	Round - Flat Top Dia	Round - Flat Top Dia	Round - Flat Top Dia	Flower

Wattage	E27	E27	12W	12W
Product Code	MTR-PST-E27-3	MTR-PST-E27-4	MTR-PST-12-3	MTR-PST-12-4
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	N/A	N/A	960	960
Color Temperature	N/A	N/A	6500K/4000K/3000K	6500K/4000K/3000K
CRI	N/A	N/A	≥70	≥70
P.F.	N/A	N/A	>0.95	>0.95
THD	N/A	N/A	<10%	<10%
Surge Protection	N/A	N/A	Up to 4KV	Up to 4KV
IP Rating	IP65	IP65	IP65	IP65
Secondary Optics (Lens)	No	No	No	No
Mounting	Pipe Pole	Pipe Pole	Pipe/ Pole	Pipe/ Pole
Fixture Color	Black	Black	Black	Black
Dimensions(mm)(B/ØxH)	210x220	150x180	220x225	220x275
Shape	Square - Flat Top Dia	Square - Flat Top Dia	Square - Flat Top Dia	Pyramid

Line Diagram

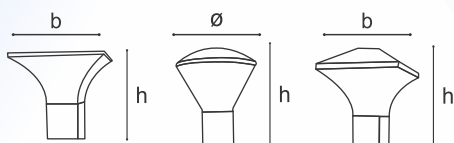

Technical Specifications

Wattage	36W	50W	36W	50W
Product Code	MTR-PST-36-1	MTR-PST-50-1	MTR-PST-36-2	MTR-PST-50-2
No/Yes Input Voltage	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz	240V AC, 50Hz
LumiNo/Yes Flux	2880	4000	2880	4000
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥70*	≥70*	≥70*	≥70*
P.F.	>0.95	>0.95	>0.95	>0.95
THD	<10%	<10%	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV	Up to 4KV	Up to 4KV
IP Rating	IP65	IP65	IP65	IP65
Secondary Optics (Lens)	No/Yes	No/Yes	No/Yes	No/Yes
Mounting	Pipe/ Pole	Pipe/ Pole	Pipe/ Pole	Pipe/ Pole
Fixture Color	Graphite Grey	Graphite Grey	Graphite Grey	Graphite Grey
Dimensions(mm)(B/ØxH)	Ø400x300	Ø400x300	Ø475x200	Ø475x200
Shape	Centre Ring	Centre Ring	Side Ring	Side Ring

Wattage	2x36W	2x50W
Product Code	MTR-PST-2x36-3	MTR-PST-2x50-3
No/Yes Input Voltage	240V AC, 50Hz	240V AC, 50Hz
LumiNo/Yes Flux	2880	4000
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥70*	≥70*
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP65	IP65
Secondary Optics (Lens)	No/Yes	No/Yes
Mounting	Pipe/ Pole	Pipe/ Pole
Fixture Color	Graphite Grey	Graphite Grey
Dimensions(mm)(B/ØxH)	Ø(400)x2)x300	Ø(400)x2)x300
Shape	Double Side Ring	Double Side Ring

Line Diagram

