




# Hexion-R

SUSPENDED HEXAGONAL RING LIGHT



## Application Areas



OFFICES



BANKS



HEALTHCARE



RETAIL



EDUCATIONAL  
INSTITUTE



COMMON  
AREA



# Hexion-R

## SUSPENDED HEXAGONAL RING LIGHT

HEXION-R is a suspended hexagonal ring light designed for modern offices and design-led spaces. Crafted from aluminium with a milky diffuser, it delivers smooth, soothing illumination. Suitable for single or grouped installations, it is available in multiple sizes and powder-coated finishes, with white and black as standard.

### Luminaire Details


Product Name	: Hexion-R
Product Type	: Suspended Hexagonal Ring Light
LED Type	: SMD
Fixture Type	: Suspended
Dimmable	: 0-10V, DALI, Phase-Cut

### Luminaire Source Details

Light Emission	: Indoor Space Lighting
Source Brand	: Bridgelux / Seoul
CRI	: ≥80
McAdam Binning	: Step 5

### Luminaire Housing

Body	: Aluminium
Reflector	: No
Diffuser Type	: Milky
Operating Temperature	: -10° to 50° C
Humidity	: RH 10-90 %
IP Rating	: IP20

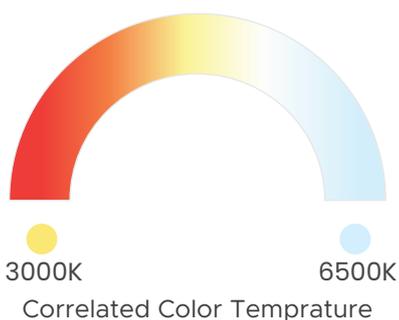

Ingress Protection  
**IP20**

**LM**  
**79**



**LM**  
**80**

**TM**  
**21**

# Technical Specifications

Wattage	40W	80W
Product Code	HXNR-SHRL-40	HXNR-SHRL-80
Nominal Input Voltage	240V AC, 50Hz	240V AC, 50Hz
Luminous Flux	3400*	6800*
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K
CRI	≥80	≥80
P.F.	>0.95	>0.95
THD	<10%	<10%
Surge Protection	Up to 4KV	Up to 4KV
IP Rating	IP20	IP20
Beam Angle	120°	120°
Mounting	Suspended	Suspended
Fixture Color	White/Black	White/Black
Dimensions(mm)(LxBxH)	300(each arm)x50x72	600(each arm)x50x72
Shape	Hexagonal Ring	Hexagonal Ring

Line Diagram

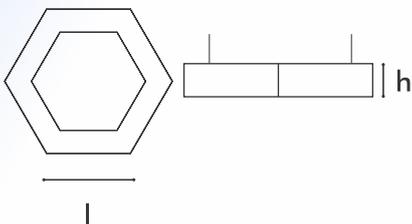

Photometric Details